

LED

50,000 Hours Life, 120-277VAC, 18W Max

Information:

The LED Lamp Emergency Backup from CYBER TECH LIGHTING is a UL Recognized LED Lamp Emergency Backup this system allows the same LED fixture to be used for both normal and emergency operation. In the event of a power failure, the LED Lamp Emergency backup self detecting smart function switches to the emergency mode and operates the existing fixture for 90 minutes. At full light output.

The unit contains a battery, charger, and special converter circuit in a single housing.

The LC-BAT-BACKUP is for use with an LED lamp load up to 18W.

Features:

- Long life high temperature recyclable Ni-Cad battery.
- Includes test switch and charge indicator accessory kit.
- For use with switched or unswitched fixtures
- Meets or exceeds all National Electrical Code and Life Safety Code Emergency Lighting

Catalog Number


Notes

Type




Specification:

Output Voltage	170VDC(Equivalent 120VAC) 0.105A
Emergency Operation	≥90 minutes at full light output.
Operating Temp	0°C to 50°C
Input Voltage	100-277 VAC, 50/60Hz
Battery	High Temp Nickel-Cadmium 24 Hour Recharge 5-7 Year Life Expectancy
UL Conditions of Acceptability	Must be factory wired Battery temperature must not exceed 50°C (UL Recognized Component)

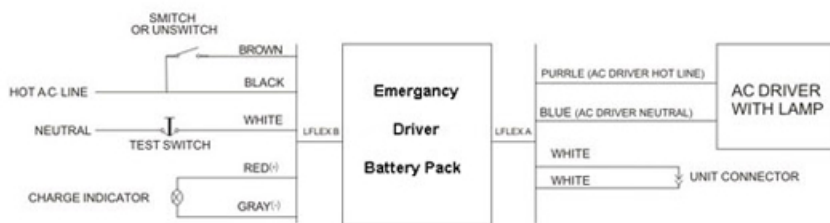

OLD Model#
EH-18170-XXU

Dimensions

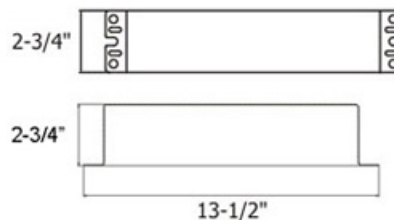

WARRANTY

5-YEAR *

Model:#	Item:#	Output Power	Input Power	Input Voltage	Output Voltage
SYH-EP-18W	LC-BAT-BACKUP	18W	6W	100-277VAC	170V DC