


Introduction

5 in 1 (Single Color&CCT&RGB&RGBW&RGB+CCT) smart strip controller is our newly developed high-end LED controller controlled by wireless remote controller, also with smart phone control and 4G long distance control (need WiFi box). The controller has auto-transmitting and auto-synchronizing function and with brightness, CCT, RGB, RGBW and RGB+CCT output mode. This controller adopt the widely used 2.4GHz wireless technology with the features of low power consumption, long signal transmitting and strong anti-interference,etc. One compatible remote control many controllers at the same time. Widely used on the controlling of hotel lighting and home lighting.

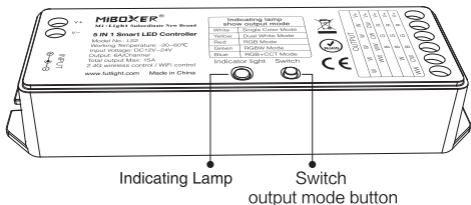


Indicating lamp showing instruction

| Indicating Lamp Color | Output Mode |
|-----------------------|-------------------|
| White Light | Single Color Mode |
| Yellow Light | Dual White Mode |
| Red Light | RGB Mode |
| Green Light | RGBW Mode |
| Blue Light | RGB+CCT Mode |

Technical Data

Model No.: LS2
 Working Temperature: -20~60°C
 Input Voltage: DC12V~24V
 Output: 6A/Channel
 Total Output Max: 15A
 Connection: Common anode

RF: 2.4GHz
 Transmitting power: 6dBm
 Control Distance: 30m
 Size: 124*38*23mm
 Weight: 60g

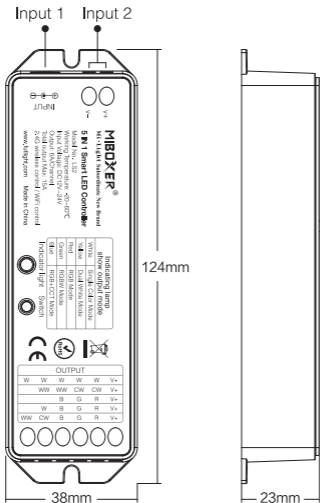

Remote Controller

Compatible with these remote controls (Purchased separately).
For more details, pls read the remote instruction.



FUT089



FUT092



FUT088



FUT096



FUT087



FUT006



FUT007



FUT091



B1 / T1



B2 / T2



B8



B4 / T4




B3 / T3




B0

Auto-synchronization function

Different controllers can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed.

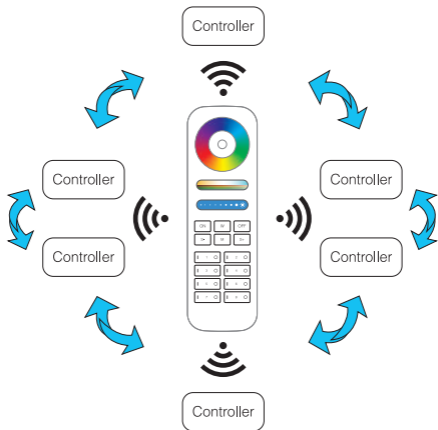


Remark:

1.  Indicating Auto-transmitting.
2. Controller will be auto-synchronizing in the same dynamic modes and within 30m controlling distance.

Auto-transmitting Diagram

One strip controller can transmit the signals from the remote control to another controller within 30m, as long as there is a strip controller within 30m, the remote control distance can be limitless.

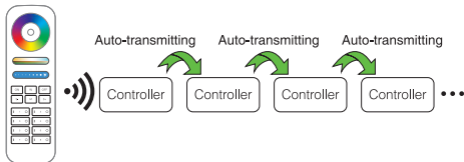


Dynamic Mode Sheet


Saturation Adjustable both on static and dynamic mode.

| Number | Dynamic mode | | Brightness & Speed |
|--------|--------------------------------|--------------------------------|--------------------|
| | Brightness, Color Temperature | RGB / RGBW / RGB+CCT | |
| 1 | White gradual change | colors gradual change | Adjustable |
| 2 | White jump to change | White gradual change | |
| 3 | White Gradual + Jump to change | RGB color gradual change | |
| 4 | NC | 7 colors jump to change | |
| 5 | NC | Random jump to change | |
| 6 | NC | RED Gradual + Jump to change | |
| 7 | NC | Green Gradual + Jump to change | |
| 8 | NC | Blue Gradual + Jump to change | |
| 9 | NC | White Gradual + Jump to change | |


Controller connect to LED strip diagram

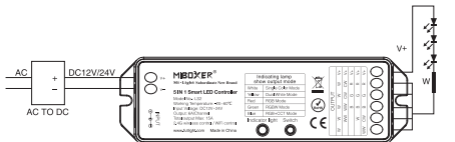


Controller connect to Single Color LED strip diagram

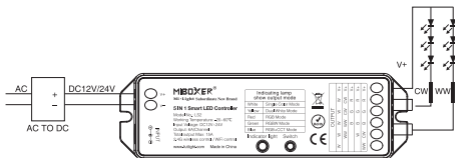


Controller connect to CCT LED strip diagram

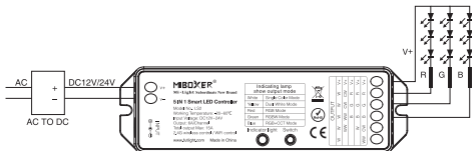

Controller connect to RGB LED strip diagram

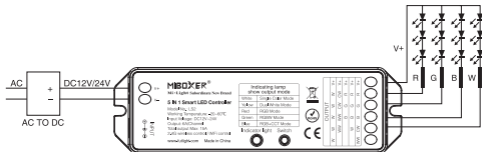

Controller connect to RGBW LED strip diagram

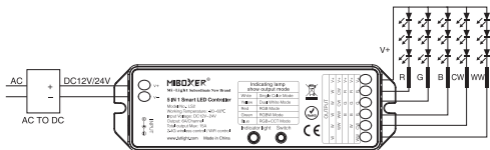

Controller connect to RGB+CCT LED strip diagram

Attention

1. Please check whether the input voltage of the constant voltage power supply is in accordance with the controller, and please check the connection of both the cathode and anode, otherwise the controller will be broken.
2. Please don't connect wires with power on.
Please turn on again only when it is in right connection and no short circuit.
3. Please do not use the controller in the place with widely range metal area or strong electromagnetic wave nearby, otherwise, the remote distance will be seriously affected .



www.futlight.com

Made in China

