CORONA Lighting
WWW.CORONALIGHTING.COM
ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

PRODUCT # : CL-360C-RC

- **Step**
- **Copper**

Fixture Specifications:

Housing: White powder coated steel mount box with S.C. bayonet socket.

Faceplate: Stamped copper available in **RC-** Raw Copper. RC will age gradually over time. Also available in **AB**, **BK**, **BZ**, **OC**, **RT**, **SI**, **WH**

Lens: High impact white polycarbonate

Socket: Top grade fixed SC bayonet socket

Lamp: 12 volt, S.C Bayonet 27W Max. L-SCB-1141 (18W) standard. LED lamps available in 2W and 2.5W, with 2700K-warm white or 3000K-cool white color temperature. Xenon and halogen lamps also available.

Gasket: Silicone gasket providing water-tight protection.

Wiring: Fixture comes prewired with a 12 inch direct burial cord. Wire connector is sold seperately. Silicone filled wire nut (**CX-854**) may be ordered to Corona Lighting.

Mounting: Recessed box to mount into concrete, brick or Masonry. Outdoor use only.

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting.
Voltage range for 12V halogen lamps are 11V-12.5V
Voltage range for LED lamps are 8V-21V.

Warranty: **AB**, **OC**, **SI**, and **RC**- Limited lifetime warranty on fixture housing and faceplate against manufacturer's defects.
BK, **BZ**, **RT** and **WH**- Five year warranty on fixture housing and faceplate against manufacturer's defects.

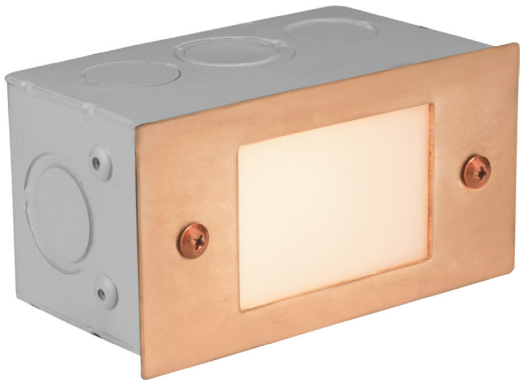

LED

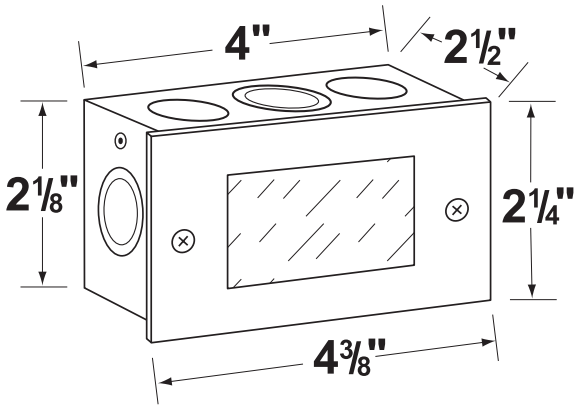

JOB INFORMATION

TYPE: **DATE:**

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.