




## DIMENSIONS:

6.5"(W) x 8"(H) x 4"(D)

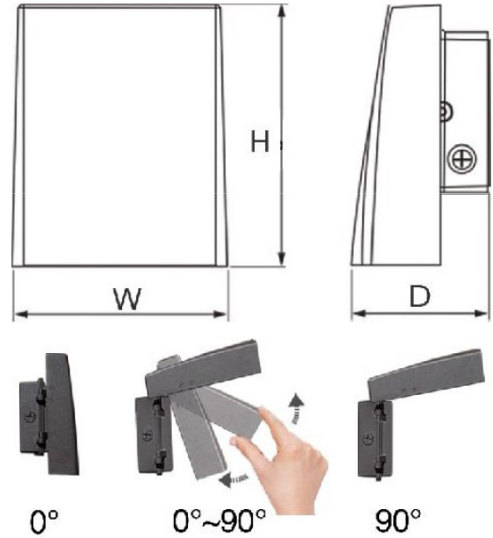

## LED CUTOFF & ADJUSTABLE WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Great for use with motion sensors or other instant on/off controls.

### ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 12W
- Input current: 0.15A Max
- Other wattages: 20W, 30W, 50W, 80W, 120W
- Power factor: >0.95

### HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- High light transmittance, anti-UV and fire resistant PC lens

### CERTIFICATIONS: UL, DLC



| MODEL     | WATTS | VOLTAGE     | LUMENS  | COLOR TEMP |
|-----------|-------|-------------|---------|------------|
| LWA-12-CW | 12W   | 120~277V AC | 1200 LM | 5000K      |
| LWA-12-WW | 12W   | 120~277V AC | 1100 LM | 3000K      |

### LIGHTING SPECIFICATIONS:

- LED type/brand: SMD 3030/ Philips Lumileds LEDs
- Total lumens: 1100 LM and 1200 LM
- Color temperature: 3000K / 5000K
- Color rendering index: >80
- Beam angle: 80° x 100°

### WARRANTY: 5 years