


## LED LINKABLE LINEAR STRIP LIGHT

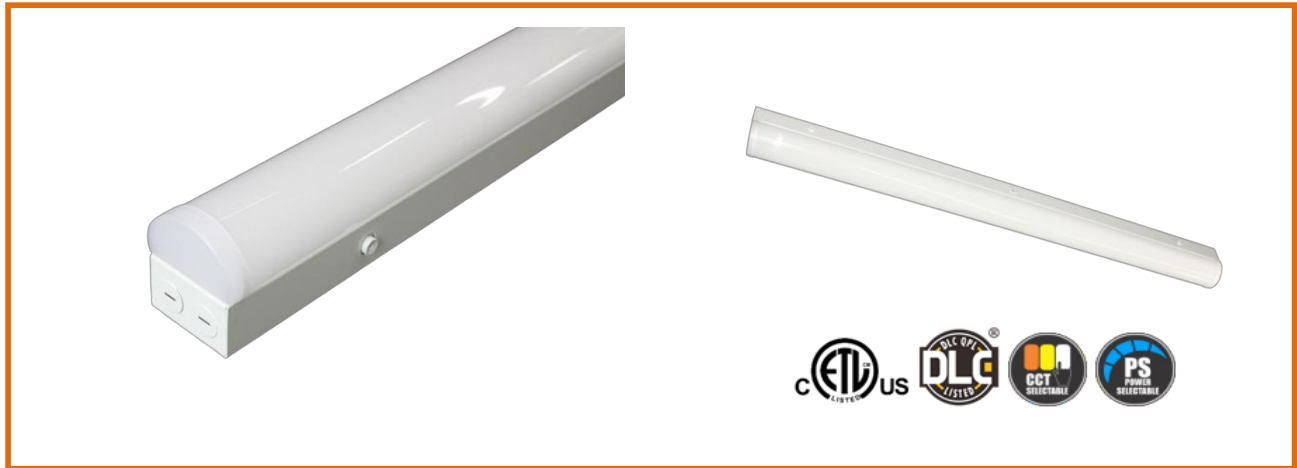

The LED linear strip is ideal for stairwell, passageway, general lighting where stand alone single or grouped controlled motion or daylight operation is required.

### KEY FEATURES

- Wattage and CCT tunable.
- High lumen efficient 130lm/w on average
- Surface-mounted and Suspending mounting.
- ETL, DLC5.1 listed.
- 5 years warranty.
- 4FT and 8FT options
- Seamless linkable (pre-wired to be Daisy-Chain)
- 0-10V dimmable in standard configuration.
- Motion sensor, emergency function for option.
- Openable, easy wiring






## APPLICATION


- Shopping malls and storage facilities
- Garages, building stairwells and hallways
- Lower ceiling warehouse and manufacturing plants

## PERFORMANCE SUMMARY


Construction&Materials		
Diffuser	PC cover	
Housing	Powder coating rust against Sheet Metal Board	
Finish	Pure White	
Environmental System		
Work Environment	Suitable for dry and damp location	
Operating Temperature	-20°C to 53°C	
Parameter		
CRI	>80	
Efficacy	130lm/w	
CCT	3CCT tunable:3000K-4000K-5000K	
Input Voltage	100-277Vac or 120-347Vac; 50/60HZ	
Wattage	4FT	20W/30W/40W
	8FT	70W/80W/90W
Dimming	0-10V dimming	
Certification	cETLus,DLC 5.1	
Emergency	Input voltage	100-277Vac or 120-347Vac; 50/60HZ
	Output power	10W
	Charge time	>24hrs
	Emergency time	1.5hrs(90min)

IMAGE	MODEL NUMBER	DESCRIPTION
	MC-STPC4	Metal plate connector for seamless linking
	MC-STWD	Metal wire guard, prevent the lamp from falling off, or prevent the lamp cover from being damaged
	MC-STHK	Hanging kit for suspending

## CUT SHEET

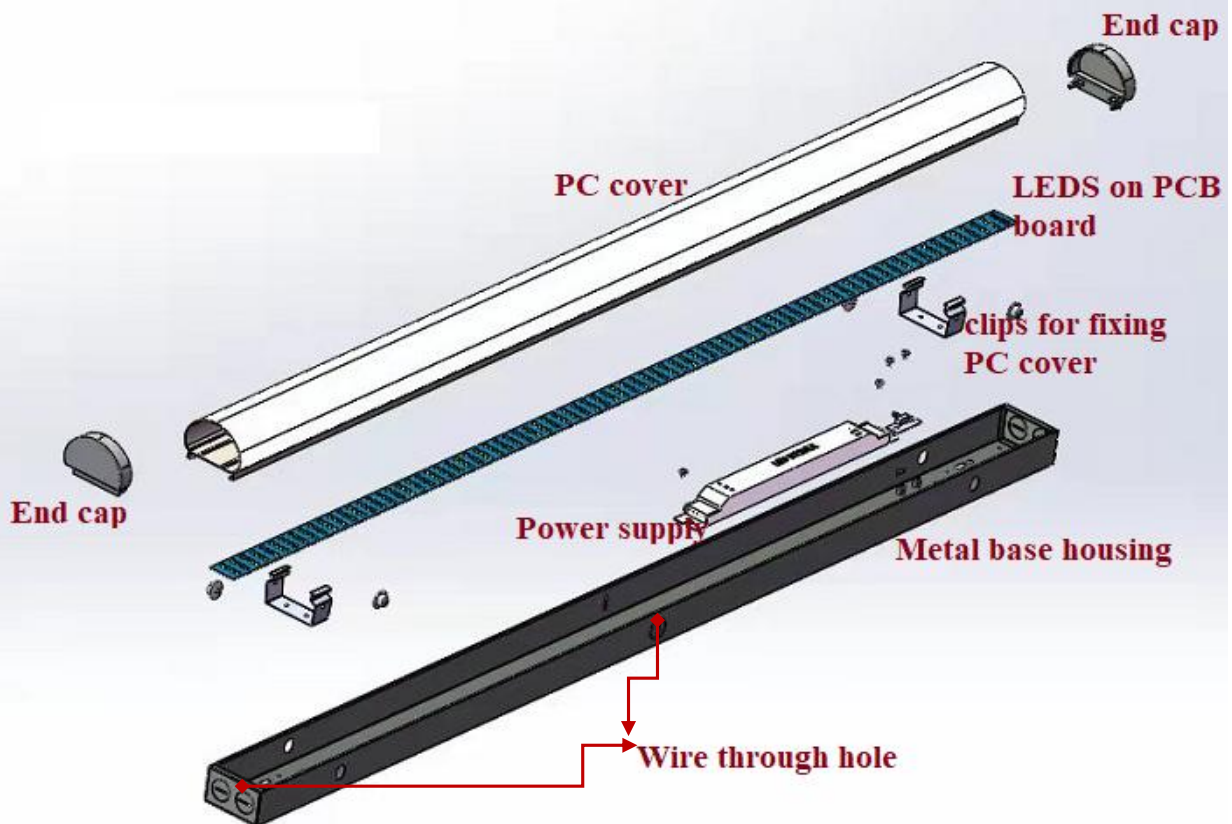


## DIMENSIONS

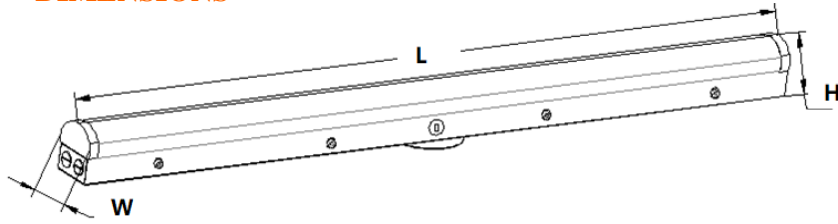

Length	Width	Height
48"	2.95"	3.27"
96"	2.95"	3.27"

## PACKAGING INFORMATION

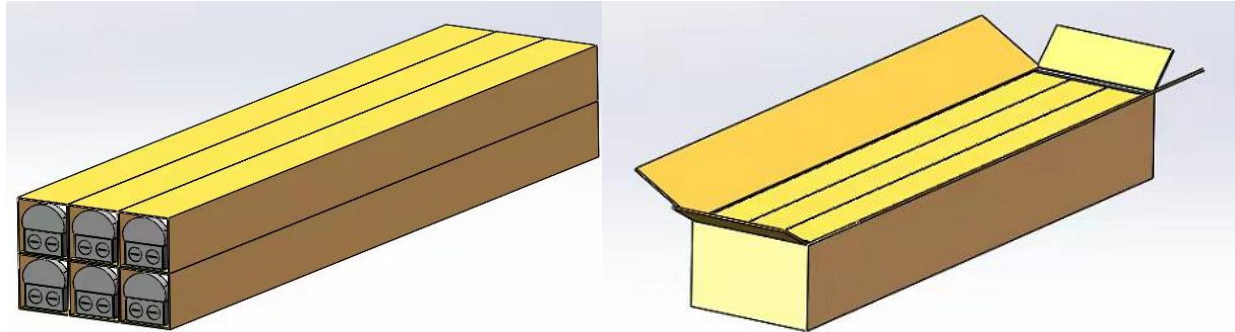

Size	Packing Detail				
	L(inch)	W(inch)	H(inch)	PC/CTN	GW(Kg)
4FT	50"	10"	7.87"	6PC	12.5
8FT	98"	7.68"	7.87"	4PC	16.7