

EMT-600-SSH

Magnetic Dimmable

Outdoor Stainless Steel Enclosure



Multi Tap: **12-15VAC**

Total Wattage: **600W max**

Input Voltage: **120V 60Hz**



Conforms to UL STD. 1838
Certified to CSA
STD. C22.2 No. 250.0, 250.7

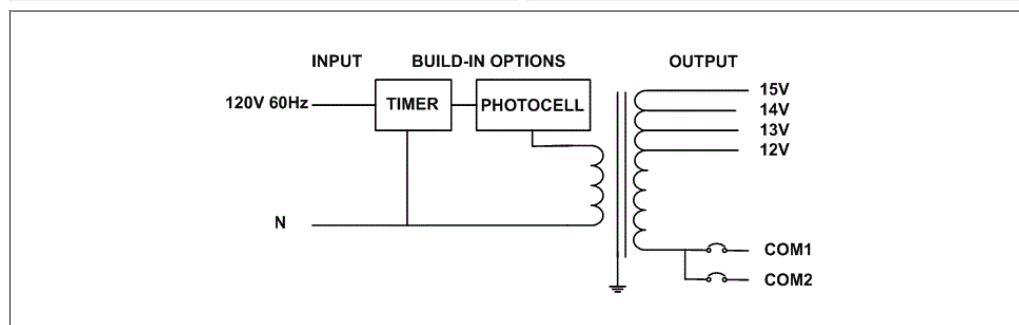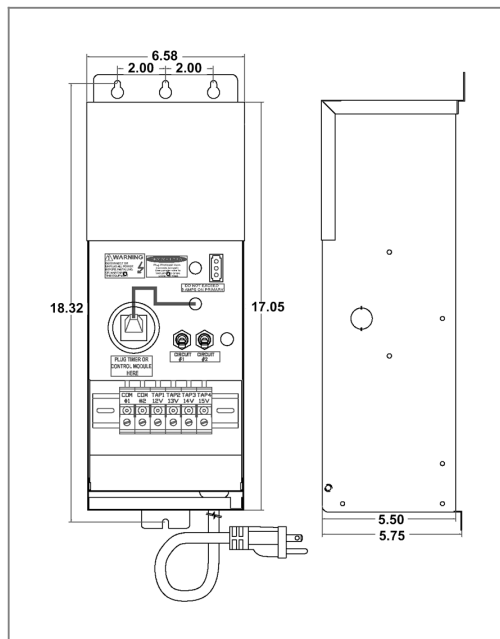

Transformer

Dimmable with any LV magnetic dimmer as long as you cover dimmer's min load.

Temperature class B(130°C)

Input leads: Line cord

Output leads: Terminal Block

Magnetic manually reset secondary breaker 25A per circuit

Timer and photocell build in options

Housing

The actual transformer 600W is encapsulated in the enclosure

The enclosure is Stainless Steel, NEMA 3R rated

Wiring compartment has 6 knockouts sizes for 3/8 inch screw cable connectors

Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded

Dimensions (inch): H = 18.95, W = 6.58, D = 5.75

Weight (LBs): 27

Electrical Parameters

Input Voltage:	120V 60Hz	
Max. input current at full load:	5A	
Output voltage without load:	12/ 13.2/ 14/ 15.2VAC	
Output voltage fully loaded:	11.3/ 12.5/ 13.1/ 14.4VAC	
Max. Total Wattage:	600W	Max. per circuit: 300W
Max. Output Current:	25/ 23/ 21/ 20A per circuit.	
Efficiency:	93%	
Load regulation:	4%	