

SPECIFICATION SHEET

PRODUCT # : CL-372B-AB

• Step Lights

• Cast Brass Faceplate

Fixture Specifications:

Housing: Heavy Duty corrosion resistant galvanized steel with self-leveling adjustable bars. White powder coated.

Faceplate: Die cast solid brass, fitted to housing with a dense silicone gasket.

Finish: **AB- Antique Bronze.** Natural toning process. AB finish will vary due to artistic process.

Lens: Frosted and heat resistant glass.

Socket: S.C. Bayonet socket, attached to housing.

Lamp: 12 volt, S.C Bayonet 27W Max. L-SCB-1141 (18W) standard. LED lamps available in 2W and 2.5W, with 2700K-warm white or 3000K-cool white color temperature. Xenon and halogen lamps also available.


Gasket: Dense silicone gasket, seals faceplate to housing. Providing weather tight protection.

Wiring: Fixture is prewired with a 3-ft 18-2 SJT-W direct burial cord. Wire connector available separately. Silicone filled wire nut (**CX-854**) may be ordered to Corona Lighting.

Mounting: Recessed mount back box. Best used in concrete, brick and other masonry, with 5x 1/2" NPT inlets.

Electrical Notes: A remote 12V transformer is required. Options are available from Corona Lighting. Voltage range for 12V halogen lamps are 11V-12.5V Voltage range for LED lamps are 8V-21V.

Warranty: Limited lifetime warranty on faceplate against manufacturer's defects.




CX-741B-L-EDBA-2W Shown

Self-Leveling Mounting Bracket




faceplate mounting screw

Self leveling adjustable brackets on the mounting box allow for proper alignment of the faceplate.

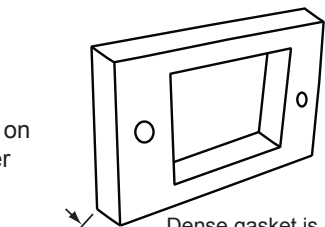

Dense gasket is included. Gasket thickness is 0.40"

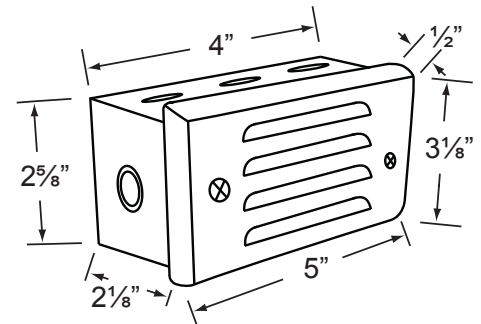

JOB INFORMATION

TYPE:

DATE:

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER: