CORONA Lighting
WWW.CORONALIGHTING.COM

ARCHITECTURAL GRADE SERIES

SPECIFICATION SHEET

PRODUCT # : CL-731B-T-AB

•Path Lights • Cast Brass

Fixture Specifications:

Housing & Shroud: Corrosion resistant cast brass, shrouds are adjustable and extendable.

Stem: 24 inch solid brass pipe with ½" NPT on bottom. *18 inch, and 12 inch stems also available.*

Finish: **AB- Antique Bronze**. Natural toning process. AB finish will vary due to artistic process. Also available in **GM**- Gun Metal

Lens: Clear and heat resistant flat glass.

Socket: Top grade fixed ceramic bi-pin socket, with lamp retension clip to securely hold lamp in place.

Lamps: Two 12V, MR-11 halogen 35W max. Standard L-FTB-20 (20w). 3W lamp LED lamp also available. See lamp guide below for more information.

Gasket: Silicone gasket for water tight sealing

Knuckle: Adjustable cast brass knuckle with thumb screw

Wiring: Fixture is prewired with a 3ft, 18-2 direct burial cord. Wire connector sold seperately. Universal connector (**CX-839**) or silicone filled wire nut (**CX-854**) is available from Corona Lighting.

Mounting Spike: Standard injection molded spike with ½" NPT threaded female hub.

Electrical Notes: A remote 12V transformer required, may be ordered to Corona Lighting seperately. Voltage range for both 12V halogen and LED lamps are 11V-12.5V. Proper grease/lubricant is suggested on threaded parts during installation process.

Warranty: Limited lifetime warranty on fixture housing and stem against manufacturer's defects.

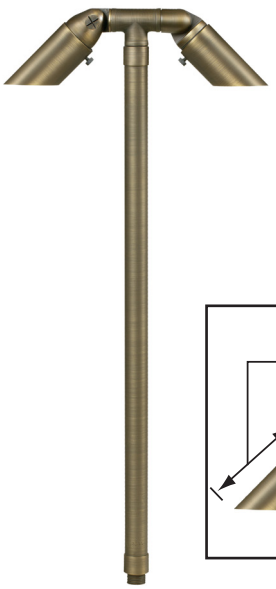



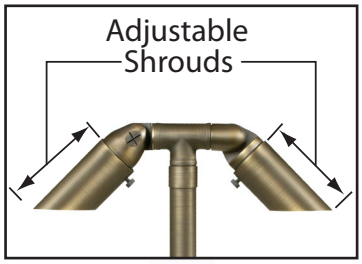

LED
3W

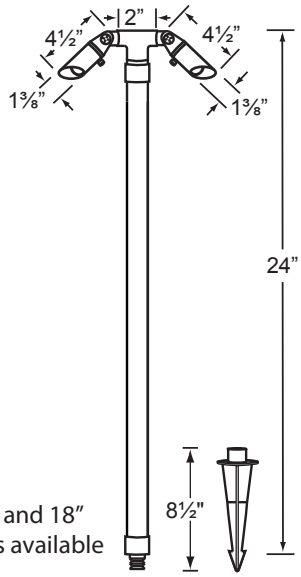

12" and 18" stems available

AVAILABLE LED LAMPS *(Corona LED lamps have a **five (5)** year limited warranty against manufacturer's defects)*

LAMP NUMBER	WATTS	BEAM SPREAD	BEAM LUMEN	COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
L-ED11-3W	3	40° FL	220	2700K	40,000	35 Watt

AVAILABLE HALOGEN LAMPS, Clear

LAMP NUMBER	WATTS	BEAM SPREAD	BEAM LUMEN	COLOR & TEMP.	RATED HOURS
L-FTB-20	20	10° NSP	500	3000K	2,000
L-FTH-35	35	30° FL	900	3000K	2,000

AVAILABLE HALOGEN LAMPS, Front Glass

LAMP NUMBER	WATTS	BEAM SPREAD	BEAM LUMEN	COLOR & TEMP.	RATED HOURS
L-FTB-C20	20	10° NSP	460	3000K	2,000
L-FTH-C35	35	36° FL	1000	3000K	2,000

JOB INFORMATION

TYPE: **DATE:**

JOB NAME & ADDRESS:

PRODUCT #:

TOTAL QUANTITY:

LAMP TYPE & WATTAGE:

TRANSFORMER:

CONTRACTOR:

SPECIFIER:

• Corona Lighting reserves the right to make any change and/or improvement to the design and construction of this fixure without further notification.