

UNDERCABINET LED



Many LED Undercabinet fixtures exist in the market. Why EnVision? We gathered several competitor fixtures and developed a fixture superior to all. The EnVision undercabinet LED fixture is easy to use and install. Install the fixture by mounting it directly to the surface of the desired location. Simply open the mounting screw cover for easy access and easy installation. With a variety of lengths, colors, and options available, be sure to find the perfect fixture. The light turns on instantly, and is not affected by frequent on/off switching.

Applications:

- Undercabinet Lighting
- Hospitality Lighting
- Residential Lighting

Product Information:

- Increase energy savings and shorten payback period
- Dimmable: Compatible with most dimmers down to 5%
- Instant-on to Full Brightness
- Link fixtures together with a linkable connector
- UV and IR Free

Type	Model	Volt	Watt	Lumen	Color	CRI	Beam Spread
11INCH	LED-UC-11i-6W-XXk-Y	120V	6W	350	XX=30k, 40k, 50k, TRI	>90	110°
14INCH	LED-UC-14i-8W-XXk-Y	120V	8W	570	XX=30k, 40k, 50k, TRI	>90	110°
22INCH	LED-UC-22i-10W-XXk-Y	120V	10W	750	XX=30k, 40k, 50k, TRI	>90	110°
28INCH	LED-UC-28i-12W-XXk-Y	120V	12W	900	XX=30k, 40k, 50k, TRI	>90	110°
42INCH	LED-UC-42i-18W-XXk-Y	120V	18W	1,250	XX=30k, 40k, 50k, TRI	>90	110°

Replace XXk with needed color temperature when ordering
 TRI: Kelvin color changing switch. Choose from 30k/40k/50k
 on the same fixture



UNDERCABINET LED FIXTURE

ACCESSORIES



Power Cord (included)
3ft Power Cord



Coupler (included)
Link Fixtures Together



Flat Tool (included)
Easily open flap for hardwire and knockout access



3/8 Connector (included)
Secure hardware accessories in fixture



Jumper Cables (optional)
Link undercabinet fixtures together. Available in 6", 12", 24" sizes. Available in white or black finish.



Item #:
UC-JUMP-(6'/12'/24')-(W/B)



Junction Box (optional)
Hardwire Accessory

Item #:
UC-JBOX

FEATURES

Switch on the Fixture

On/Off switch: switch your fixture on or off on the fixture (Single Color Model)

Hi-Low switch: control the lumen intensity on the switch without a dimmer (Tri Color Model)

Tri-Color (Option)

EnVisions Tri-Color UC has a switch that changes the kelvin from 30k/40k/50k in the same fixture

Hardwire Access

Easily access the hardwire components by opening the flap with a flat tool (included)

Aluminum Housing

Fixture acts as a heat sink increasing its life span

Back Knock-Out

Screw the fixture to the surface with the back knock-outs (Suggested for hard surfaces)

Built-In Screw

Easy install screw built into the front of the fixture (Suggested for wood surfaces)

Hardwire Knock-Outs

Several knock-outs are located on the fixture to bring your hardwire power into the fixture. The longer the undercabinet, the more knock-out holes

Frosted Lens


High quality frosted lens is made from PMMA to prevent yellowing

Edge-Lit Technology


Clean seamless light without any hotspots

Connection Port

Plug your powercord to the input to turn on the fixture. Use a jumper cable and link fixtures together.

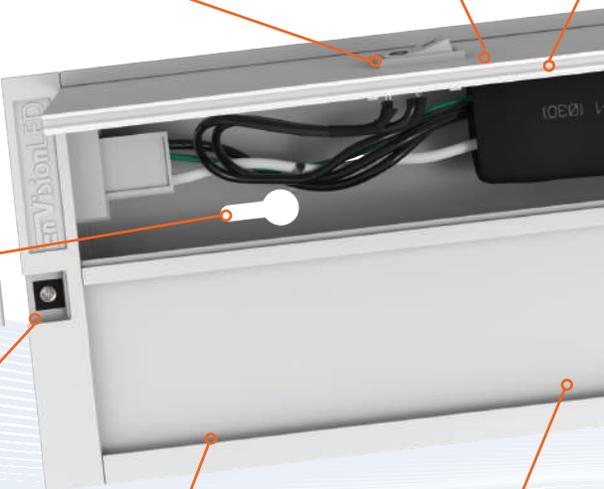

DIMENSIONS

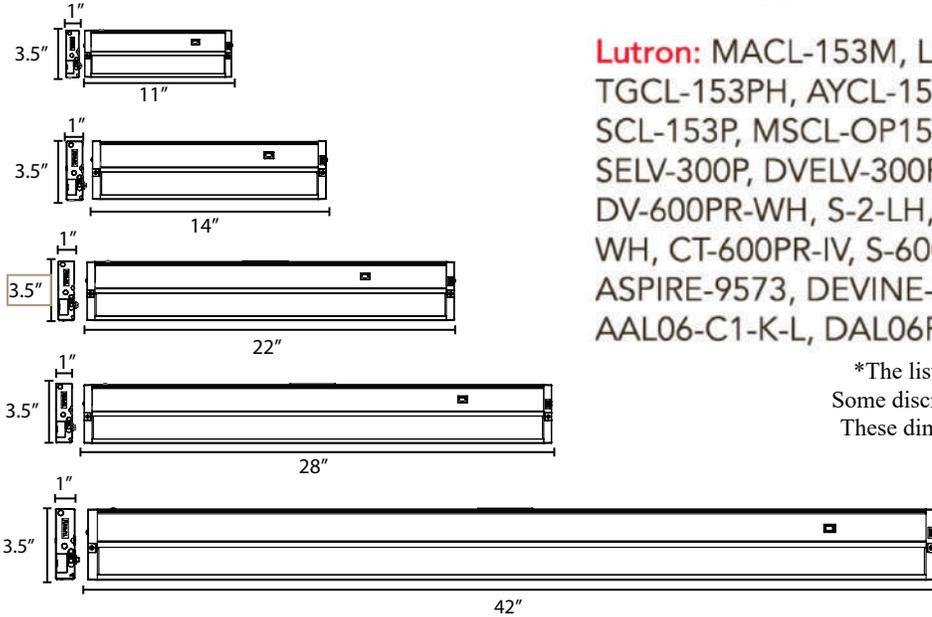


DIMMER COMPATIBILITY*

Lutron: MACL-153M, LGCL-153PLH, TAL06P-C1-K-L, TGCL-153PH, AYCL-153P, DVCL-153P, DVSCCL-153P, SCL-153P, MSCL-OP153M, CTCL-153P, TTCL-100, SELV-300P, DVELV-300P, DV-600PR-LA, DV-600PR-BL, DV-600PR-WH, S-2-LH, CT-600PR-WH, DVW-603-PGH-WH, CT-600PR-IV, S-600PR-LA, MA-T51H-WH
Cooper: ASPIRE-9573, DEVINE-DLC03P, SKYE-SLC03P, SAL06P, AAL06-C1-K-L, DAL06P-C1-K-L
Leviton: 6631, 6633

*The listed dimmers have been tested and proven to work. Some discrepancy may exist due to different electrical work. These dimmers are recommended, but is not limited to other dimmers from working.


PHOTOMETRICS

Light Distribution Curve:

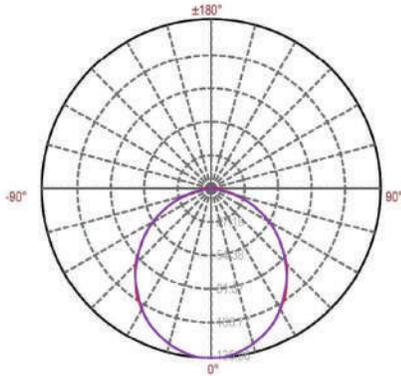


11inch

Light Distribution Curve:

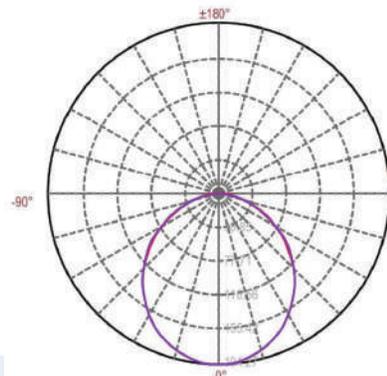


14inch

Light Distribution Curve:

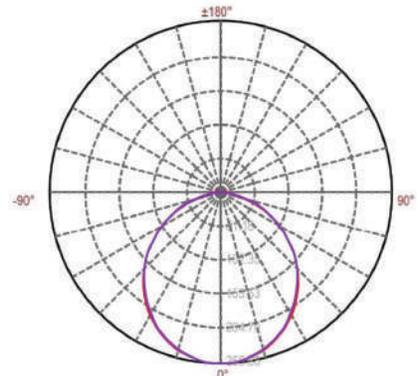


22inch

Light Distribution Curve:

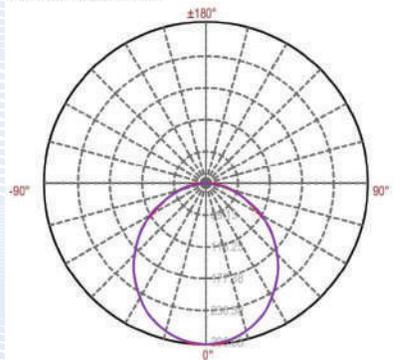

28inch

Light Distribution Curve:

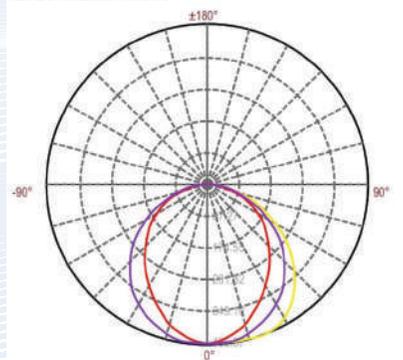

42inch