

**LED**  
TECHNOLOGY



50,000 Hours Life, 50 Watt, 120-277VAC 50/60Hz

### Applications:

Parking Lots, Security Lighting, Ceiling Lighting

### Features:

- Integrated 50 Watt LED
- 57.6°57.6ft of Light Coverage When Mounted at 16.4 feet
- Dusk to Dawn Photocell
- Can be Wall or Post Mounted. Compatible with Mounting Arms
- Rugged Corrosion Resistant Cast Aluminum Housing
- Poly Carbonate Lens Protects LED
- IP65 Outdoor Wet Location

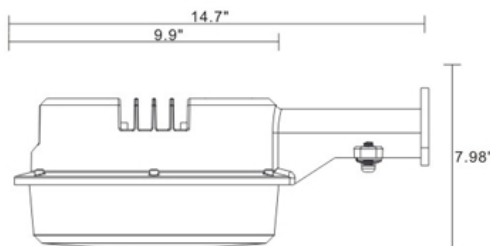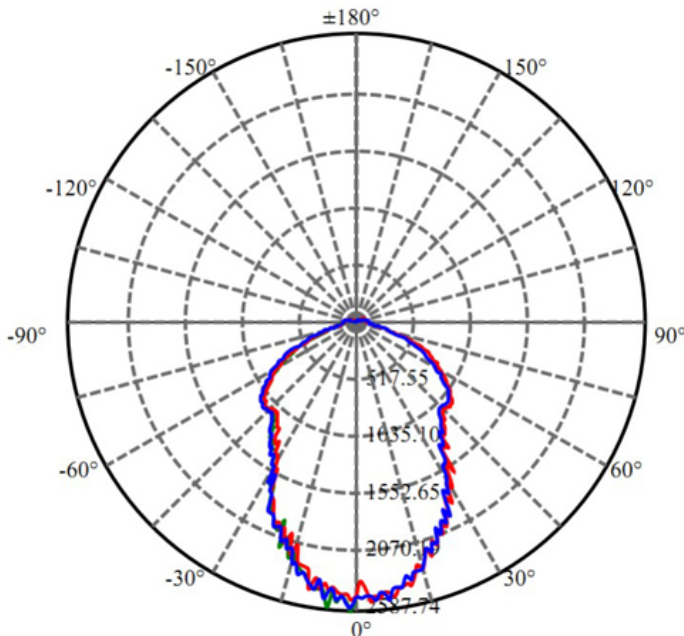

### Specification:

Input Line Voltage:	120-277VAC
Input Power	50W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	45°C/113°F
CCT	5000K
CRI	≥70
Lumens	6500
CBCP	2587

Distance	Max, Ave	Beam angle of C247.5plane79.33	Height
1.0m	2587.7, 1942.8 lx		165.85cm
3.281ft	240.66, 180.68 fc		5.44ft
2.0m	646.9, 485.7 lx		331.71cm
6.562ft	60.16, 45.17 fc		10.88ft
3.0m	287.5, 215.9 lx		497.56cm
9.843ft	26.74, 20.08fc		16.32ft
4.0m	161.7, 121.4 lx		663.41cm
13.12ft	15.04, 11.29 fc		21.76ft
5.0m	103.5, 77.7 lx		829.27cm
16.4ft	9.63, 7.23 fc		27.20ft
6.0m	71.9, 54.0 lx		995.12cm
19.68ft	6.69, 5.02 fc		32.64ft
7.0m	52.8, 39.6 lx		1160.97cm
22.96ft	4.91, 3.68 fc		38.08ft
8.0m	40.4, 30.4 lx		1326.83cm
26.24ft	3.76, 2.83fc		43.53ft

Max , Ave Beam angle of C247.5plane79.33

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model:#	Description	wattage	lumens
LWP60YP-BZ/850	50Watt LED Area Light Bronze Color, Day Light	50W	6500

\* 5 Years Limited Warranty

UPC: 80680215441-1

