

Project: _____
 Part#: _____
 Type: _____



Large Area Lights Gen 2

3-Power + 3CCT Selectable

Light up your outdoor area with the new EnVision Bolt Series, our latest line of Area Light Gen 2 fixtures with high lumen per watt efficacy combined with a stunning finish. The Large BOLT series are available in a trunnion, yoke, slip fitter, or straight arm mount, and now with our **Select-N-Switch** Technology. Enjoy lighting up your outdoor space with over 145lm/w+ efficiency, and now with selectable power and color temperatures, these fixtures are like 6 fixtures in one!

Applications:

- General outdoor lighting
- Landscape lighting
- Pathways, streets, loading areas, stadium lighting, etc.

Detail Specifications:

- Average life (L70) of 70,000 hours with the integration of Philips Lumileds 3030 chips
- Operating temperature -40 ~ 122 F°
- PF >0.9 / Input: .85A/ Output: 36-66V DC
- IP67 Waterproof Rated

Product Information:

- 3 Selectable wattages and color temperatures
- Area Light Gen 1 and Shoebox Fixtures combined into one
- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Type III optics standard/ Type I, II, IV, & V by request
- 1.5 Ft power cable cord connected to every fixture

Series	Wattage	Color	Finish	Voltage	Bracket	Accessories		
LED-ARL2	3P100W	60W	TRI: 30K/40K/50K Selectable	BZ: Bronze	UNV 100-277V	YK Yoke TR Trunnion SF Slip Fitter SA/ADJ Straight Arm Adjustable SFA Slip Fitter and Straight Arm	(Blank)	None Daylight Sensor and Bi-Level Motion Sensor Controller for HB01DMS-A (Controls multiple)
		80W					HB01DMS-A	
		100W					HB01R	
	3P150W	120W	LED-ARL2-100/150W-HSS-BZ	House Side Shield (100/150W)				
		135W	LED-ARL2-240/300W-HSS-BZ	House Side Shield (240/300W)				
		150W	LED-ARL2-100/150W-RSS-BZ	Road Side Shield (100/150W)				
	3P240W	180W	LED-ARL2-240/300W-RSS-BZ	Road Side Shield (240/300W)				
		210W						
		240W						
	3P300W	260W						
		280W						
		300W						

Specs and model numbers are subject to change with or without notice

FEATURES**3-Power/3CCT Selectable**

Choose between 3 different wattages and 3 different colors, all with the flick of a switch

0-10V Dimmable

With 0-10V Dimmable capabilities and an IP Rated 67 certification, use these fixtures practically anywhere

Switchable Bracket


Easily swap out different types of brackets for different types of installations

High Efficacy

Enjoy lighting up your outdoor spaces with up to 145 lumens per watt efficacy

Optional Accessories

Additional accessories include items such as the road side and house side shield, different types of optics, as well as a daylight/ bi-level motion sensor

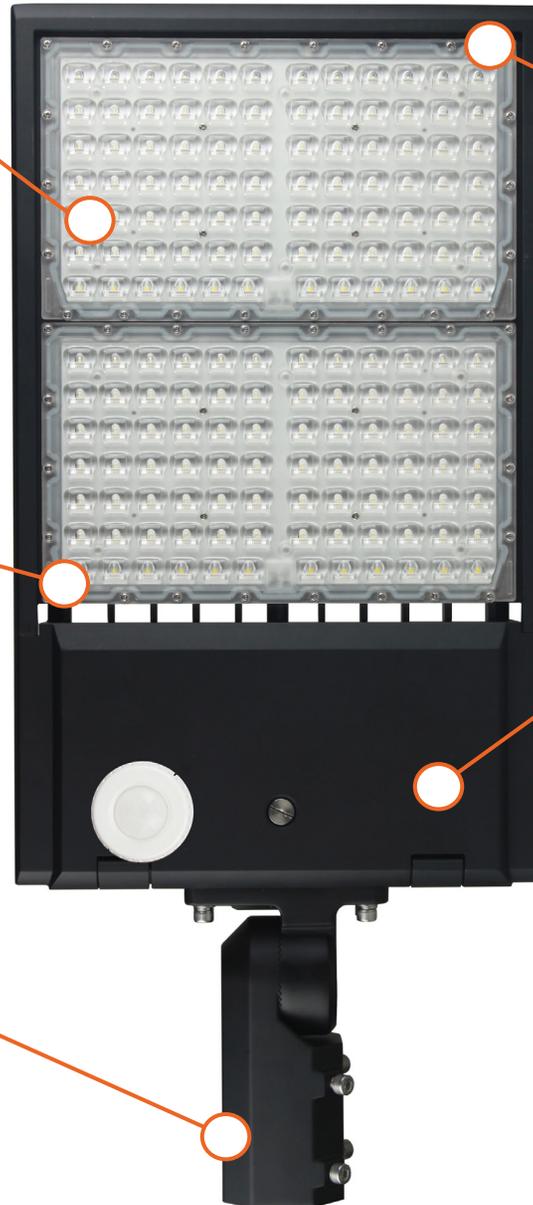

ACCESSORIES



Yoke



Trunnion



Straight Arm Adjustable



Slip Fitter



Slip Fitter & Straight Arm

- Flood light bracket
- Ideal use on a wall
- Adjustable design to angle area light luminaire

- Flood light bracket
- Ideal use on a wall
- Can be used for shoebox
- Adjustable design to angle area light luminaire

- Shoebox fixture bracket
- For use with round or square poles
- Can be used for shoebox
- Adjustable design to angle area light luminaire

- Shoebox fixture bracket
- For use with round or square poles
- Adjustable design to angle area light luminaire
- Inner diameter of 2.5" to fit 2-2.4" poll

- Flood light bracket
- For use with round or square poles
- Can be used for shoebox
- Adjustable design to angle area light luminaire

ACCESSORIES MODEL

Accessory Model	Accessory Description
LED-ARL-OPTICS-T-II	Type II Optical Lens
LED-ARL-OPTICS-T-IV	Type IV Optical Lens
LED-ARL-OPTICS-T-V	Type V Optical Lens
HB01DMS-A	Bi-Level Motion Sensor + Daylight Harvesting Sensor
HB01DMS-A-CTR	Controller for Sensor
LED-ARL-YK	Yoke Bracket
LED-ARL-TR	Trunnion Bracket
LED-ARL-SF	Slip Fitter Bracket
LED-ARL-SA/ADJ	Straight Arm Adjustable Bracket
LED-ARL-SFA	Slip Fitter and Straight Arm Bracket
SMART-MOD-BT	Bluetooth Control Module
SMART-MOD-BT-GTW	Bluetooth Control Gateway



Optic Lenses

-100/150W 1 Pieces Required
-240/300W 2 Pieces Required



HB01DMS-A

-Bi-Level Motion Sensor and Daylight Harvesting Sensor



Smart Module


-Bluetooth Control hooks up to 0-10V wires
-Dimming and time control with mobile device




Slip Fitter & Straight Arm Bolt Distance
(Center to Center) 5 1/2"
Diam. Hole - No Thread 3/8"

Straight Arm Adjustable Bolt Distance
(Center to Center) 5 1/2"
Diam. Hole - No Thread 3/8"


100/150W Dimensions

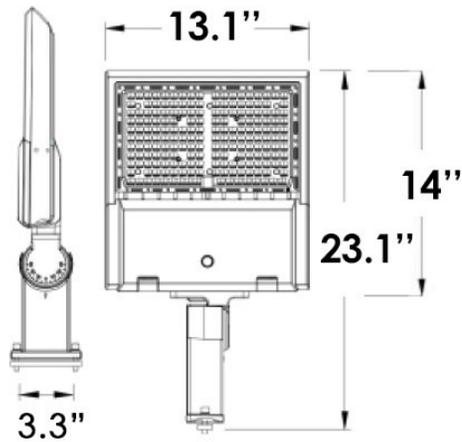


Slip Fitter & Straight Arm

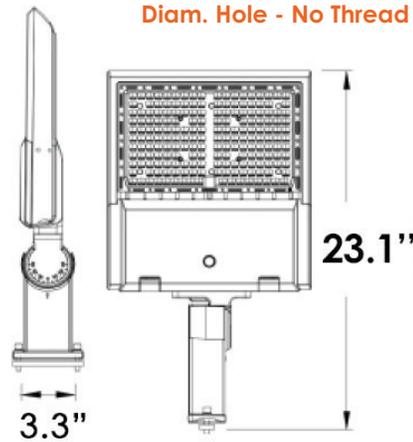

Straight Arm Adjustable

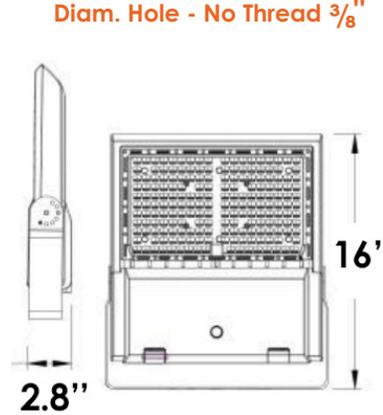


Trunion

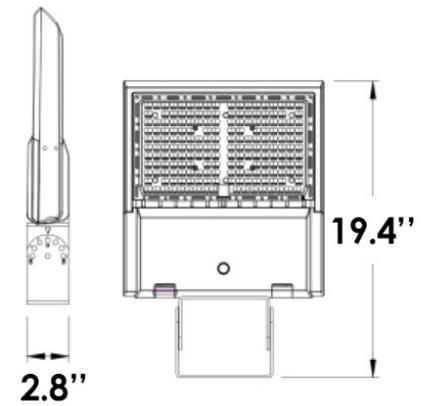


Yoke


240/300W Dimensions

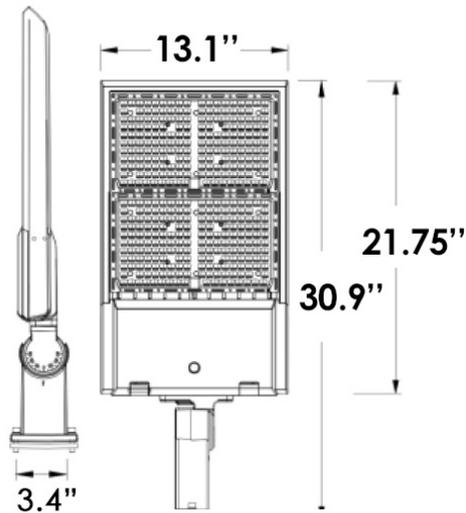


Slip Fitter & Straight Arm

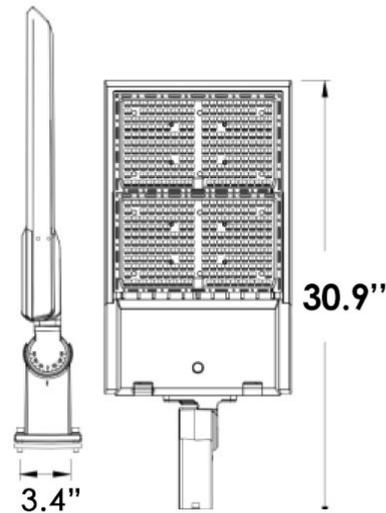

Straight Arm Adjustable

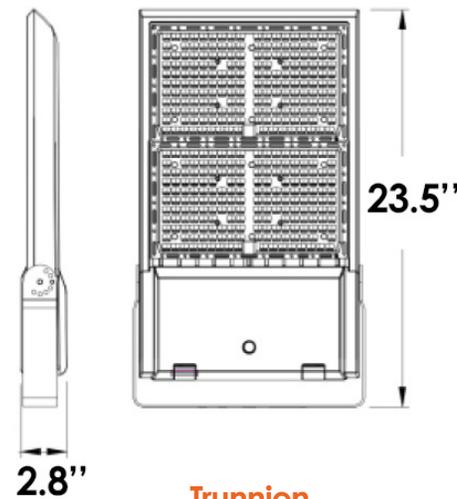

Trunion

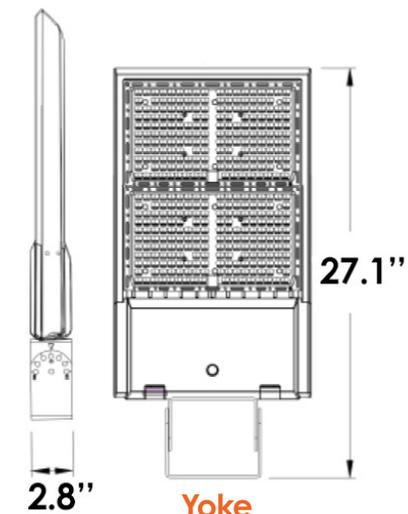

Yoke