

LED Corn Bulbs
5-CCT & 3-Power Selectable



LED-CRN-3M36-TRI-E26



LED-CRN-3M36-TRI-EX39



LED-CRN-3M54-TRI-E26



LED-CRN-3M54-TRI-EX39



LED-CRN-3M80-TRI-EX39



LED-CRN-3M120-TRI-EX39

The EnVision corn light allows the end user to light an area in a full 360° spectrum. The lamp includes an internal driver with a 4kV surge protector, and has a universal input voltage of 120-277v. The light turns on instantly, and is not affected by frequent on/off switching. With 3 different color temperatures and 3 wattages to swap from, it's like having nine SKU's all in one.

Detail Specifications:

- Water Resistant
- 3-CCT Selectable 30/40/50K
- Beam Angle: 360° Spectrum
- 4kV Surge Protector
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear COB
- Average life (L70) of 50,000 hours

Applications:

- Residential/Commercial Lighting
- Outdoor/Garden Lighting
- Warehouse/Garage Lighting

Product Information:

- Switch between 30/40/50K color temps
- Also switch between 3 different wattage types
- Includes 4kV surge protection
- 120-277V with ballast bypass
- DLC Listed on EX39 Base Only
- 50,000 life hours

Certifications:

- UL Certified
- Energy Star Certified
- 5 Year Limited Warranty
- IP65 Rated

Series

- LED-CRN-3M36-TRI-E26**
36/27/18w
- LED-CRN-3M36-TRI-EX39**
36/27/18w
- LED-CRN-3M54-TRI-E26**
54/45/36w
- LED-CRN-3M54-TRI-EX39**
54/45/36w
- LED-CRN-3M80-TRI-EX39**
80/63/54w
- LED-CRN-3M120-TRI-EX39**
120/100/80w

Optional Accessories (Order Separately)

Sensor

Remote Control

HB01DMS-A
Motion Sensor

HB03R
Remote for
HB01DMS-A Sensor

Specs and model numbers are subject to change with or without notice.

FEATURES



3-Watt and 3-CCT Selectable

High Quality LED Chips

Grade A Heat Sync

Multiple Applications

E26 / EX39 Base

3-CCT Selectable




3-Power Selectable



E26 Base
Standard Lamp Base




EX39 Base
Larger & Wider Tip Base




Optional Motion + Daylight Sensor
Only available for 3M80 & 3M120 Bulbs

Specs and model numbers are subject to change with or without notice.


DIMENSIONS

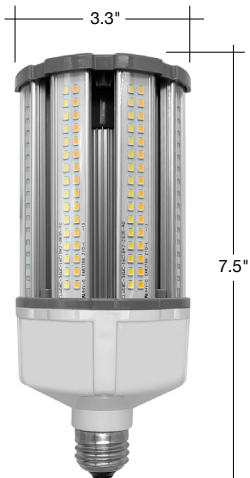


LED-CRN-3M36-TRI-E26

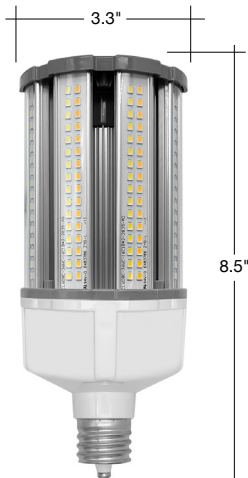

LED-CRN-3M36-TRI-EX39

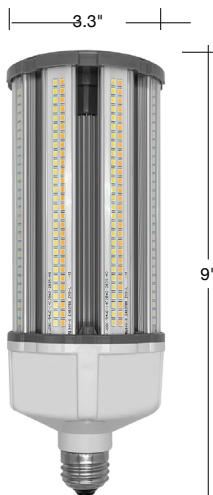


LED-CRN-3M54-TRI-E26

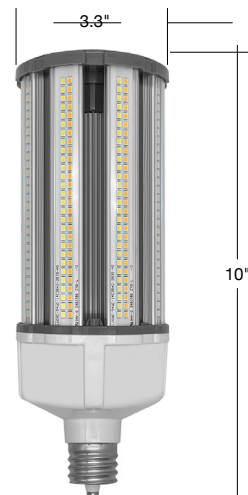

LED-CRN-3M54-TRI-EX39



LED-CRN-3M80-TRI-EX39

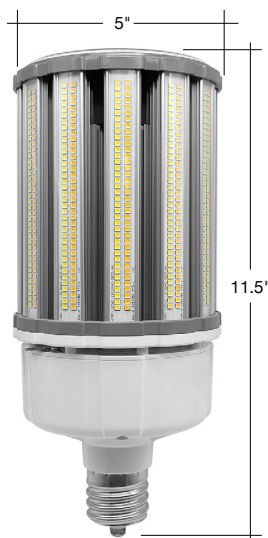

LED-CRN-3M120-TRI-EX39



HB03R
Controller for
HB01DMS-A



HB01DMS-A
Bi Level Motion Sensor and
Daylight Harvesting Sensor

Model	Voltage	Watts	Lumens	Color
LED-CRN-3M36-TRI-E26	120-277V	18/27/36w	145lm/w	50/40/30k
LED-CRN-3M36-TRI-EX39	120-277V	18/27/36w	145lm/w	50/40/30k
LED-CRN-3M54-TRI-E26	120-277V	36/45/54w	145lm/w	50/40/30k
LED-CRN-3M54-TRI-EX39	120-277V	36/45/54w	145lm/w	50/40/30k
LED-CRN-3M80-TRI-EX39	120-277V	54/63/80w	145lm/w	50/40/30k
LED-CRN-3M120-TRI-EX39	120-277V	80/100/120w	145lm/w	50/40/30k

CONTROLLER

Accessory Model	Description
HB03R	Controller for HB01DMS-A (Controls Multiple)

SENSOR

Accessory Model	Description
HB01DMS-A	Bi-Level Motion + Daylight Sensor