

Project: \_\_\_\_\_

Part#: \_\_\_\_\_

Type: \_\_\_\_\_

## Round Slim Canopy Light 3CCT + 5-Watt Selectable



Light up your parking garage with the EnVision Round Slim Canopy Light. This canopy light is easy to install, offers high efficiency, and is available with 3 switchable color temps (30K/40K/50K) and 5 selectable wattages! Provide unparalleled lighting for parking structures with unique reverse-throw lighting, which emits light upward as well as down. Optional motion sensor modulates light intensity when nearby vehicles or occupants are detected.

### Detail Specifications

- Operating temperature -4 -- + 124 F°
- PF >0.9 / Input: .85A/ Output: 36-66V DC

### Why the EnVision Parking Garage Light?:

- Optic lens provides forward throw light
- Easy installation with universal mounting plate
- 5 year limited warranty.

### Applications:

- Parking Structures

### Product Information:

- IP67-rated, Integrated driver, 100-277VAC
- Dimmable using 0-10V control
- No ultraviolet light emitted
- Easy to install and operate.
- Energy saving, Long lifespan.
- Instant start, NO flickering, NO humming.

LED - RCP -	5-Watt Selectable	- TRI -	Finish	Accessories	EMB	Warranty
1	2	3	4	5	6	7

1	Product	2	5-Watt Selectable	3	Color	4	Finish	5	Accessories	6	EMB	7	Warranty
LED-RCP	Round Slim Canopy Light	5P55W	55/47/38.5/30/22W - 145lm/W 7,975lm (55W) / 6,815lm (47W) 5,583lm (38.5W) / 4,350lm (30W) / 3,190 (22W)	TRI	30/40/50K	WH	White	(Blank)	None	(Blank)	None	(Blank)	5 Years (incl.)
		5P100W	100/90/80/70/60W - 145lm/W 14,500lm (100W) / 13,050 (90W) 11,600 (80W) / 10,150 (70W) / 8,700 (60W)			BZ	Bronze	BMS	Bi-Level Motion Sensor (Internal)	EMB	Emergency Backup (90 Mins. Internal 20W)	10YR	10 Years

Specs and model numbers are subject to change with or without notice

## Product Features

### Aluminum Housing

Built with an aluminum housing, this fixture is built to last

### Ribbed Lens

Reduces glare to avoid eye discomfort



### Integrated Driver

This fixture is dimmable with the IP65-rated, 100-277vac integrated driver

### Reverse-Throw Lighting

Provide unparalleled lighting for parking structures with unique reverse-throw lighting, which emits light upward as well as down


10.03in

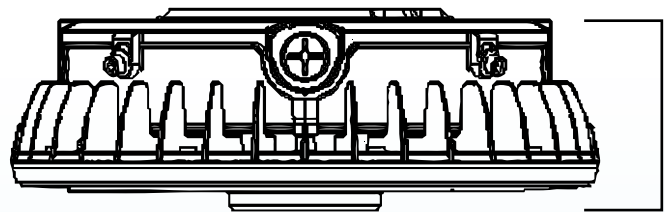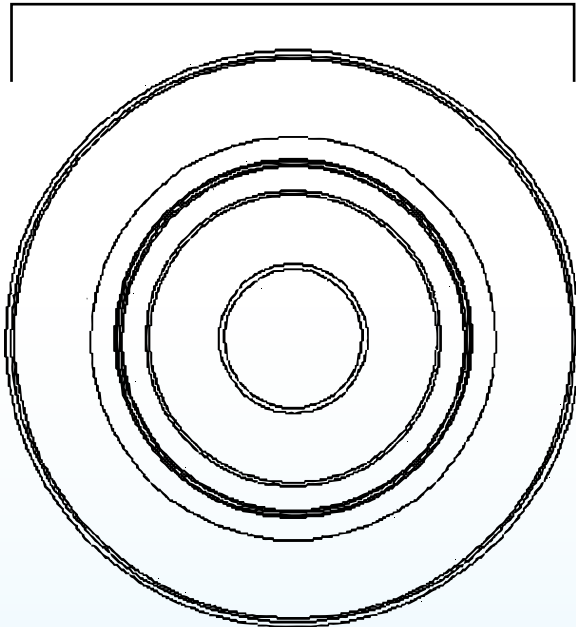

3.11in


## PHOTOMETRICS

Luminous Intensity Distribution Curve

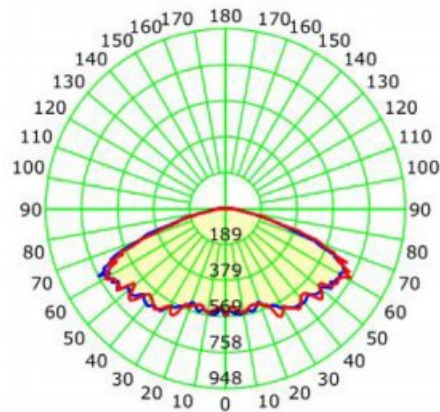


— C0-C180 — C90-C270

Illuminance at a Distance

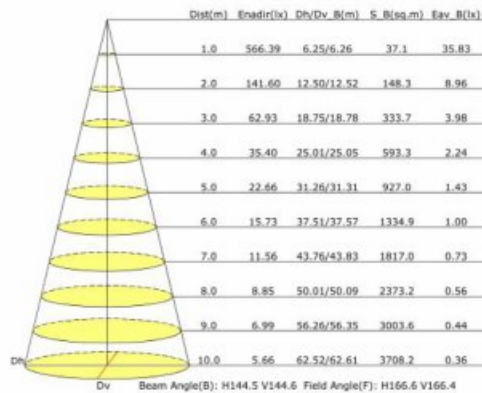


25W

Luminous Intensity Distribution Curve

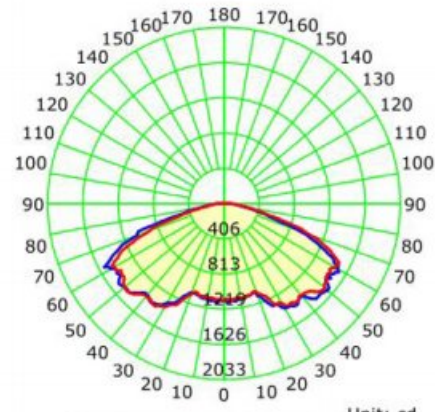


— C0-C180 — C90-C270

Illuminance at a Distance

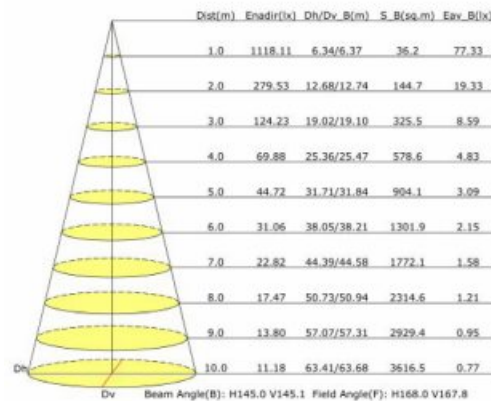


55W

Luminous Intensity Distribution Curve

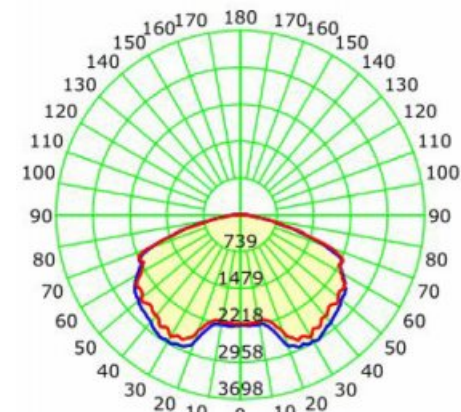


— C0-C180 — C90-C270

Illuminance at a Distance

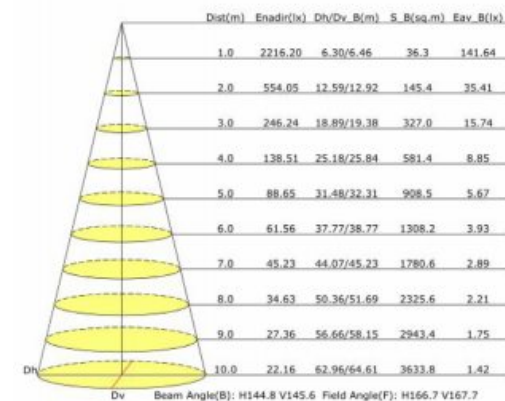


100W


## MOTION SENSOR INFORMATION

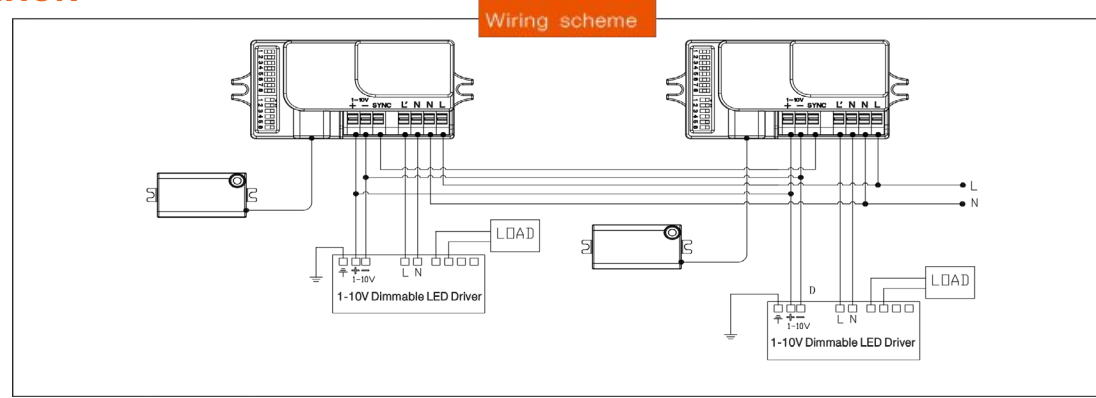


## FEATURES

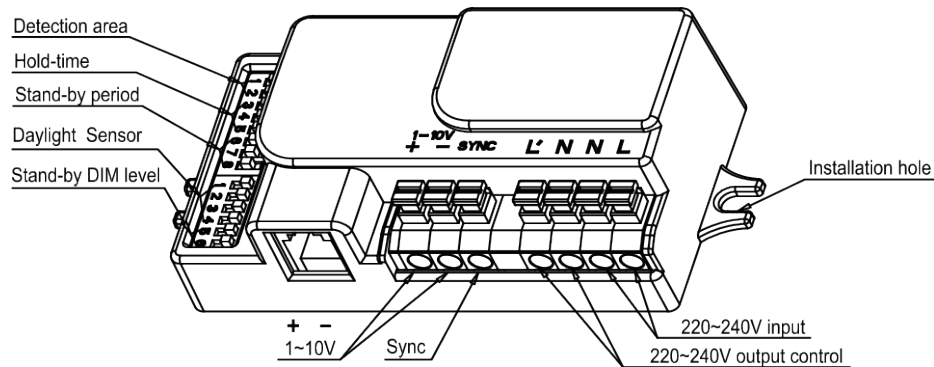

## DETECTION PATTERN



Wall mounting pattern (Unit: m)  
Suggested installation height: 1-1.8m

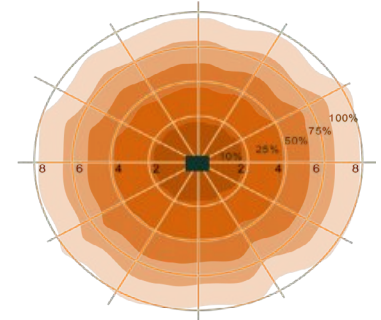

Ceiling mounting pattern (Unit: m)  
Suggested installation height: 2.5-8m

## DIMENSIONS

