



# ARCY-Line: 4" & 6" Architectural Cylinder Up and/or Down Light

3-CCT + 3-Power Selectable w/ Photocell



WATT	LUMENS
6	600
8	800
10	1,000
12	1,260
16	1,680
20	2,100
22	2,040
29	2,720
35	3,400

## Detail Specification:

- Finish: Bronze, Black, White
- IP Rating: Wet Location IP65
- Beam Angle: 40° standard (other optics available)
- CCT: 30/40/50K Selectable
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Clear glass with optics
- Average life (L70) of 50,000 hours

## Applications:

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

## Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Features on/off switch.
- 1.5' STJW 18.3 AWG cable whip included
- 3-Selectable Light Options: Up Only, Down only, Up & Down Light
- Select-n-Switch Technology: 3-CCT Selectable + 3-Power Selectable
- Easy Beam Angle Swap: available for field swap or at factory level
- Instant-On to full brightness

## Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

## Mounting & Installation:

- Mounts to 3 or 4" J-box
- Covers a standard 4" recessed j-box

## Certifications:

- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Finish	Photocell	Beam Angle
<b>LED-CYA-UD-4-3P20-TRI</b> 4" 20/16/12W	<b>BZ</b> Bronze	<b>PC</b> Photocell is included with on/off switch	<b>(blank)</b> 40°
<b>LED-CYA-UD-6-3P35-TRI</b> 6" 35/29/22W	<b>WH</b> White		<b>15D</b> 15°
	<b>BL</b> Black		<b>60D</b> 60°

Specs and model numbers are subject to change with or without notice.

# 4" & 6" Cylinder Up and/or Down Light: ARCY-Line

3-CCT + 3-Power Selectable w/ Photocell

## FEATURES




Die-Cast Aluminum

Corrosion Free Powder Coat

Clear Lens with Optics

### SELECTABLE LIGHT DIRECTION

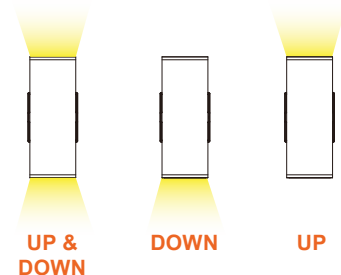

Light Direction

UP  
FULL  
DOWN

3-Power Selectable



Selectable Photocell




3-CCT Selectable




Field Swap Optics

## DIMENSIONS

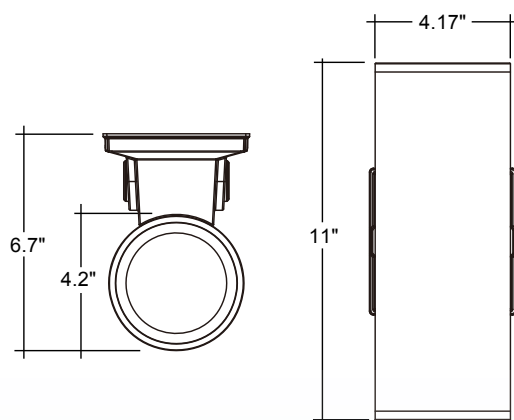


4"

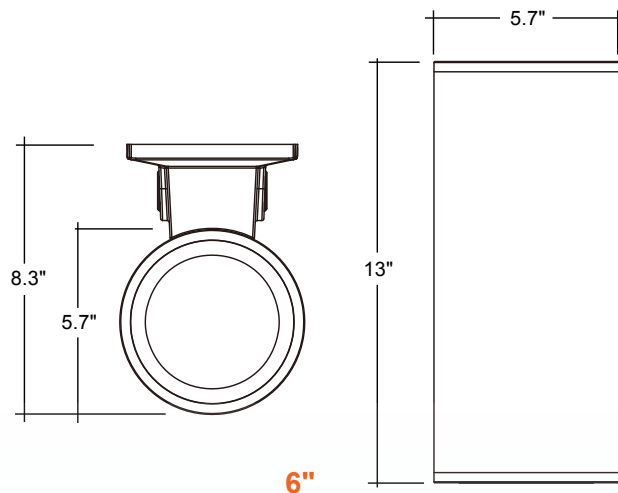

6"

## ACCESSORIES



## BEAM

Accessory Model	Description
CYA-UD-4-OPTIC-15	Cylinder: ARCY-Line Optic (Field Install)
CYA-UD-6-OPTIC-15	Cylinder: ARCY-Line Optic (Field Install)
CYA-UD-4-OPTIC-60	Cylinder: ARCY-Line Optic (Field Install)
CYA-UD-6-OPTIC-60	Cylinder: ARCY-Line Optic (Field Install)