

# 4' T8 Dimmable Bypass Tubes

## 5-CCT Selectable + 3-Power Selectable

Tubes



WATT	LUMENS
12	1,560
15	1,950
18	2,300

### Detail Specifications:

- IP Rating: Damp Location
- Beam Angle: 300°
- CCT: 30/35/40/50/65K Selectable
- Dimming: Triac and ELV (0-10V Dimmable using T8-MOD-010V-DIM driver)
- Chip: SMD 2835, R9 >50, CRI >80
- Pin: G13 Bi-Pin
- Operating Temperature: -40° - 130° F
- Lens: Frosted lens with film protectant for extra shatter protection (food industry OK)
- Average life (L70) of 70,000 hours

### Applications:

- Fluorescent Retrofitting
- Walkways & Pathways
- 2x2 or 2x4 Fixtures
- T8 Strip Fixtures
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

### Product Information:

- Standard size of fluorescent versions
- Suitable for use in existing fixtures
- Approved for use in enclosed fixtures
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable
- Instant-On to full brightness

### Driver Options:

- UNV: 120-277V Triac & ELV Dimmable
- Built in 2.5Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

### Mounting & Installation:

- Ballast bypass only (single or double ended connection)
- Wire any 2 pins
- See wiring diagram for more information

### Certifications:

- UL Listed for USA and CA
- DLC Listed
- NSF Rated
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

**LED-T8-RFD-GL-4FT-3P18-5CCT**  
12/15/18W Selectable

**Optional Accessories**  
(Order Separately)

*Fixture Options*

**T8-4FT-2LAMP-STRIP**

4ft 2-Lamp Strip (Single ended wiring)

**T8-4FT-2/1L-STRIP**

4 FT T8 1 or 2-Lamp Strip Fixture

(Double Sided Connection)

**T8-8FT-4/2L-STRIP**

8 FT T8 2 or 4-Lamp Strip Fixture


(Double Sided Connection)

**T8-4FT-RF**


4FT Symetric White Reflector

*Specs and model numbers are subject to change with or without notice.*

## FEATURES

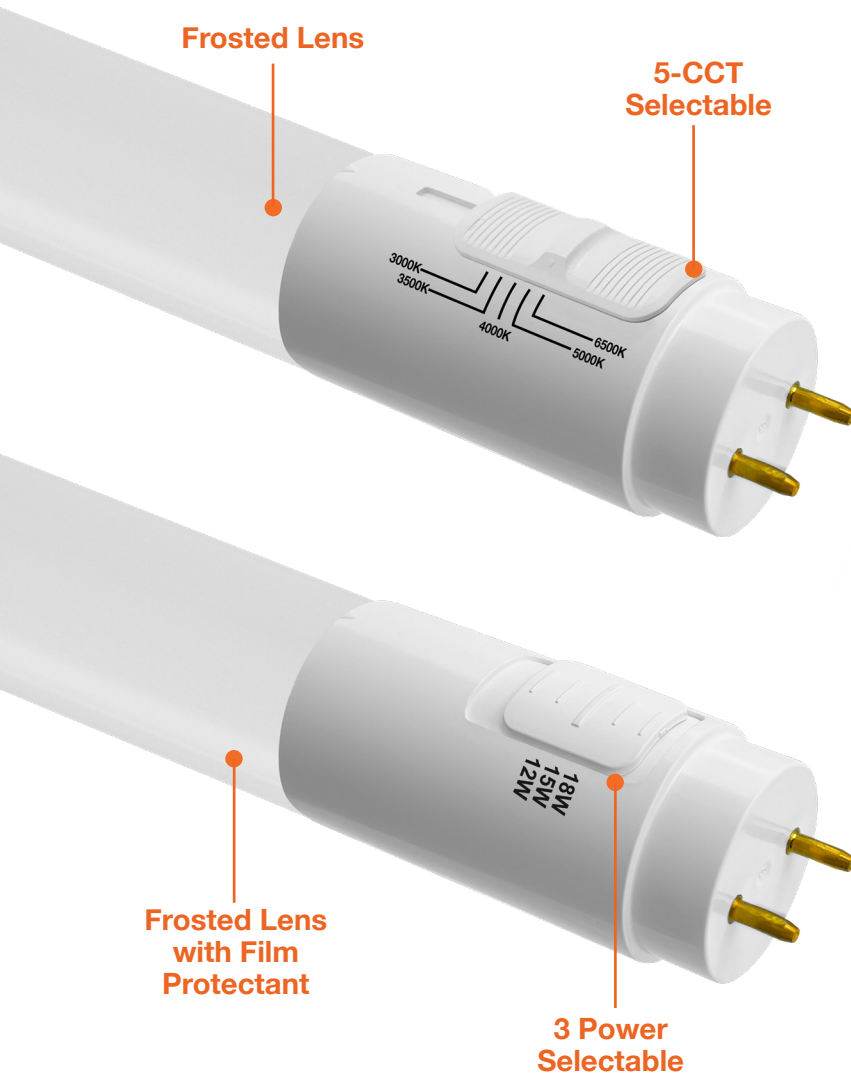

## DIMENSIONS

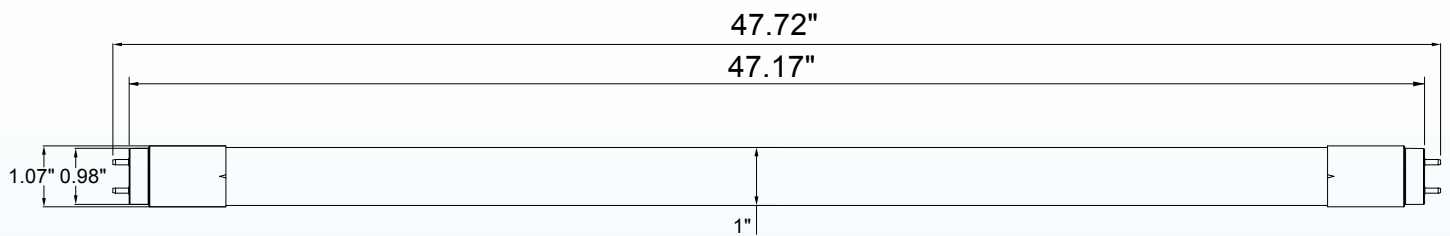

# 4' T8 Dimmable Bypass Tubes

## 5-CCT Selectable + 3-Power Selectable



Model	Voltage	Watts	Lumens	Color	CRI
LED-T8-RFD-GL-4FT-3P18-5CCT	120-277V	12/15/18w	1560/1950/2300	30/35/40/50/65	>80

### LAMP STRIP FIXTURE

Model	Description
T8-4FT-2LAMP-STRIP	4ft 2-Lamp Strip (Single ended wiring)
T8-4FT-2/1L-STRIP	4 FT T8 1 or 2-Lamp Strip Fixture (Double Sided Connection)
T8-8FT-4/2L-STRIP	8 FT T8 2 or 4-Lamp Strip Fixture (Double Sided Connection)
T8-8FT-4/2L-STRIP	8 FT T8 2 or 4-Lamp Strip Fixture (Double Sided Connection)

### REFLECTOR

Model	Description
T8-4FT-RF	4FT Symetric White Reflector

### TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

Lutron
DVELV-300P
DVELV-303P
MAELV-600

*Specs and model numbers are subject to change with or without notice.*