

Vanity Fixtures

Modern Indirect

Project:	Part #:
Type:	

1/0	-:4	Fixture	
vai	ши	I DX II UI (C	









Detail Specification:

- Power: 21W
- Lumens: 2,700
- · Finishes: Black, Brushed Nickel, White
- IP Rating: IP54 Damp Location
- · Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -40° 114° F
- · Lens: Frosted Acrylic, non-yellowing
- Average life (L70) of 50,000 hours

Applications:

- Bathrooms & Lavatories
- Hallways & Corridors
- Residential & Multifamily
- · Education, Healthcare, Retail, Hospitality

Product Information:

- · Available in 23.6" length
- Indirect light output
- Wide j-box for easier installation in retrofit and new construction applications
- Select-n-Switch Technology: 5-CCT Selectable

Driver Options:

- Triac & ELV dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- · Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- 30/40 Junction Box
- · Surface mount bracket included

Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

FRONT VIEW

Series

-WH

LED-VT-ID-24-21W-5CCT-WH

LED-VT-ID-24-21W-5CCT-BL


LED-VT-ID-24-21W-5CCT-BN Brushed Nickel

Specs and model numbers are subject to change with or without notice



Vanity Fixtures Modern Indirect

FEATURES

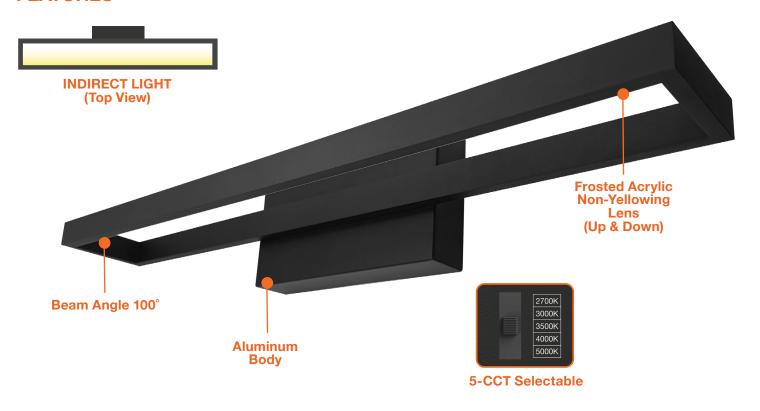

DIMENSIONS

