



ARCY-Line: Track Heads

COB 5-CCT Selectable



Detail Specifications:

- Finish: White, Black
- Damp Location Rated
- Chip: High Lumen COB, R9 >50, CRI >90
- 2 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: PMMA Clear Lens
- Average life (L70) of 50,000 hours

Applications:

- General Track Lighting
- Residential & Multifamily
- Art Galleries, Museums
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- Metal housing and trim for better heat dissipation
- 350° Horizontal Rotation, 90° Vertical Rotation
- Interchangeable beam angles
- For use with H-Type track or surface mount installation
- Select-n-Switch Technology: 5-CCT
- Instant-On to full brightness

Driver Options:

- Voltage: 120V
- Triac Dimmable Down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Compatible with H-Type single circuit track system
- Surface mount accessory option available for 3/4O J-Box

Certifications:

- ETL Listed for USA and CA
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101

Series	Beam Angles	Finish	Mounting
LED-ATH-10W-5CCT 10W • 1,000lm	30D ¹ 30°	WH White	(Blank) H-Type Track
LED-ATH-20W-5CCT 20W • 2,000lm	36D ¹ 36°	BLK Black	SM Surface Mount
LED-ATH-30W-5CCT 30W • 3,000lm	24D 24° 60D 60°		





1. • 30D standard on 10W.
• 36D standard on 20W & 30W.
• 24D & 60D available for all sizes

Optional Accessories (Order Separately)		
Optic Lens	Surface Mount	Emergency Backup ¹ (field install)
ATH-10W-24D 24° Beam Angle	ATH-SM Surface Mount for 3O/4O Jbox	LED-EMB-15W-HV-0/10V-2P Up to 14W fixtures
ATH-10W-60D 60° Beam Angle		LED-EMB-25W-HV-0/10V-2P Up to 24W fixtures
ATH-20W-24D 24° Beam Angle		
ATH-20W-60D 60° Beam Angle		
ATH-30W-24D 24° Beam Angle		
ATH-30W-60D 60° Beam Angle		

1. Field installable.
Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.


FEATURES

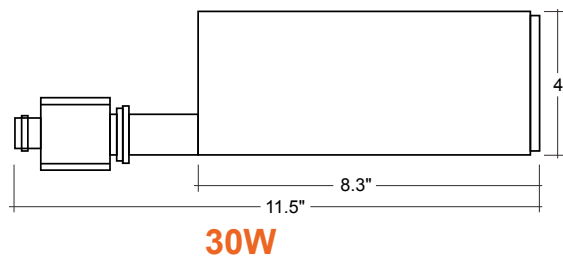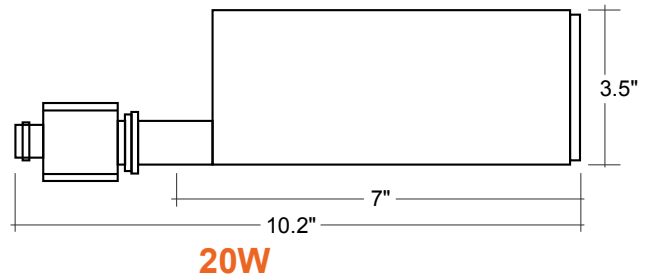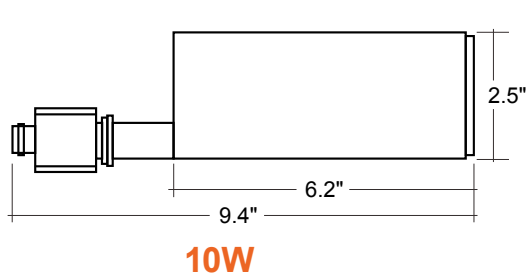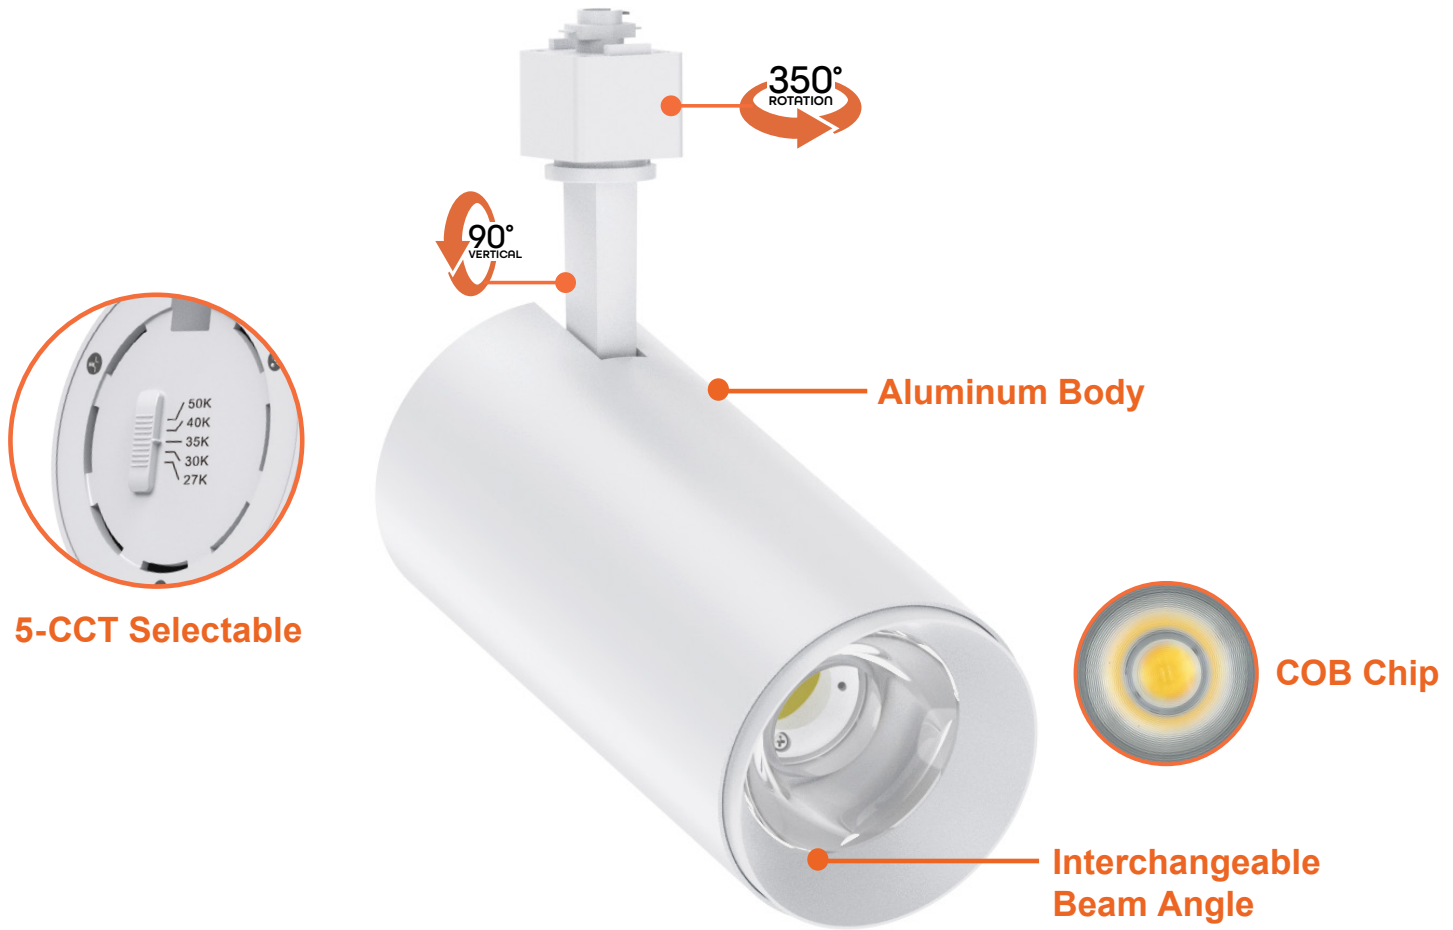


ACCESSORIES



LENS

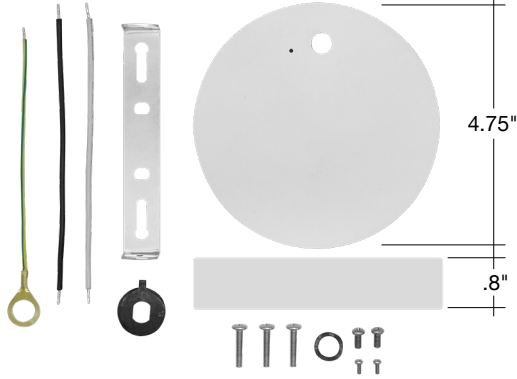

ATH-SM

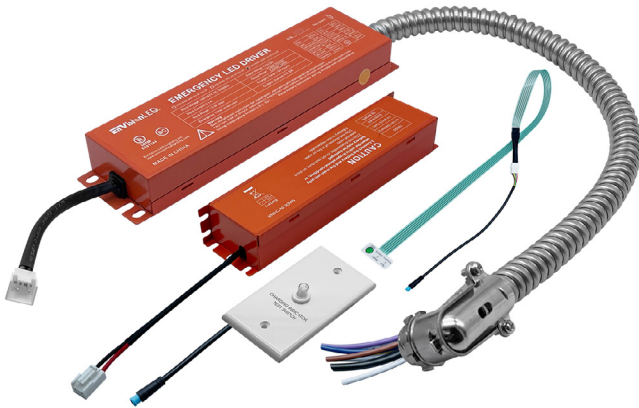

LED-EMB-15W-HV-0/10V-2P
LED-EMB-25W-HV-0/10V-2P

QUICK SHIP MODELS

Model	Voltage	Watts	Lumens	Color	CRI
LED-ATH-10W-5CCT-30D-WH	120V	10w	1000	27/30/35/40/50K	>90
LED-ATH-10W-5CCT-30D-BLK	120V	10w	1000	27/30/35/40/50K	>90
LED-ATH-20W-5CCT-36D-WH	120V	20w	2000	27/30/35/40/50K	>90
LED-ATH-20W-5CCT-36D-BLK	120V	20w	2000	27/30/35/40/50K	>90
LED-ATH-30W-5CCT-36D-WH	120V	30w	3000	27/30/35/40/50K	>90
LED-ATH-30W-5CCT-36D-BLK	120V	30w	3000	27/30/35/40/50K	>90

OPTIC LENS

Model	Description
ATH-10W-24D	Track Heads: ACRY-Line 24D Optic
ATH-10W-60D	Track Heads: ACRY-Line 60D Optic
ATH-20W-24D	Track Heads: ACRY-Line 24D Optic
ATH-20W-60D	Track Heads: ACRY-Line 60D Optic
ATH-30W-24D	Track Heads: ACRY-Line 24D Optic
ATH-30W-60D	Track Heads: ACRY-Line 60D Optic

SURFACE MOUNT

Accessory	Description
ATH-SM	Surface Mount for 30/40 Jbox

BATTERY BACK-UP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 14W fixtures
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

Lutron	Leviton	Toshiba	Panasonic
DVCL-153P	6674	WDG9001	WN575149
SCL-153P			
LGCL-153P			
MACL-153M			
MSCL-OP153M			
S-600P			
AYCL-153			
DV-600P			