

Project: _____
 Part#: _____
 Type: _____

UFO High Bay



The EnVision round UFO highbay uses advanced LED technology in order to achieve a high lumen output with low power consumption. With the integration of a Sosen driver and Philips Lumileds 3030 chips, the end user will be extremely satisfied with the output and longevity of the fixture. EnVision's Highbay fixture is 0-10V Dimmable, available in 3 lumen packages, has various accessory options, and achieves 130 LM/W to qualify for DLC 4.0 Premium. Additional accessories available include surface mount kit, motion sensor, emergency back up, acrylic and PC reflectors. Fixture includes suspension hook for chain install.

Applications:

- Gymnasium Lighting
- Warehouse Lighting
- Workshop Lighting
- Outdoor Lighting

Product Information:

- 0-10V dimmable integrated driver
- Durable die-cast aluminum housing
- IP-67 fully water & dust-proof

LED-RHB - **Watts** - **Color** - **Finish** - **EMB** - **Mount** - **Reflector** - **Accessory** - **Warranty**


1 2 3 4 5 6 7 8 9

1 Product	2 Watts	3 Color	4 Finish	5 EMB	6 Mount	7 Reflector	8 Accessory	9 Warranty
LED-RHB	100W 13,000lm	40K 4000K	BLK	Black (Blank)	None (Blank)	None (Blank)	None (Blank)	5 Years (incl.)
	150W 19,500lm	50K 5000K	WH	White EMB	Emergency Backup	ALM Aluminum Reflector	BMS Bi-Level Motion Sensor	10YR 10 Years
	240W 31,200lm					ACR Acrylic Reflector	SBT Bluetooth Control	
						ACR-BC ACR w/Bottom Cover		

DIMENSIONS

240W

100/150W

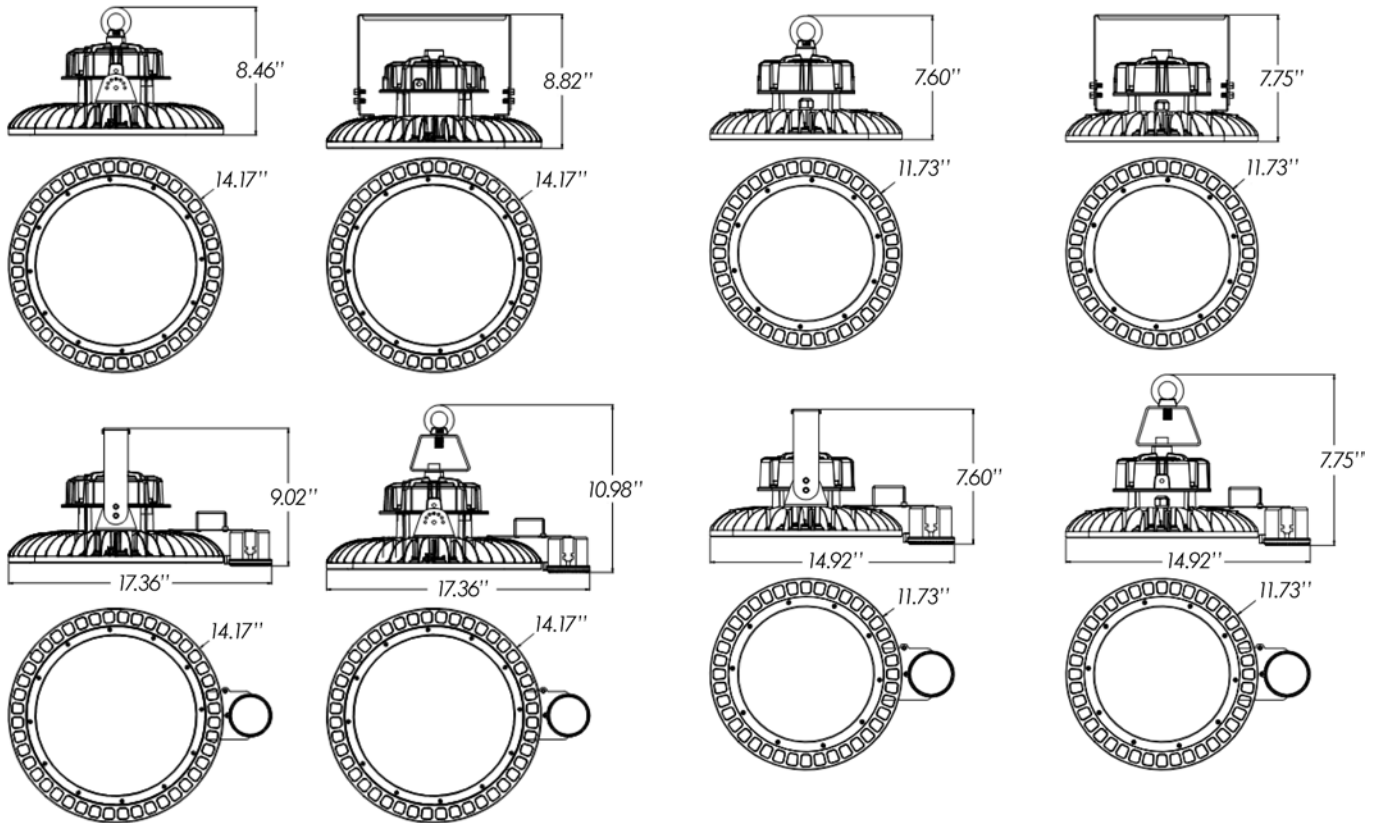

ACCESSORIES



Acrylic Bottom Cover (90°)
(RHB-100/150-ACR-BC
RHB-240-ACR-BC)



Acrylic Reflector (90°)
(RHB-100/150-ACR-RF
& RHB-240-ACR-RF)



Aluminum Reflector (90°)
(RHB-100/150-ALM-RF-90
RHB-240-ALM-RF-90)



Surface Mount Yoke
(RHB-100/150-SM
& RHB-240-SM)

FEATURES

Changeable Bracket

Use suspension hook or surface mount yoke bracket

Die-cast Aluminum

Rugged powder-coated aluminum housing

Phillips LEDs

Reliable and powerful LED chips for long-lasting efficacy

Integrated Heatsink

Aluminum heatsink integrated into fixture body

Fully Waterproof



IP67-rated enclosure can be used outdoors or hosed down for cleaning



PHOTOMETRICS



100W

Luminous Intensity Distribution Curve

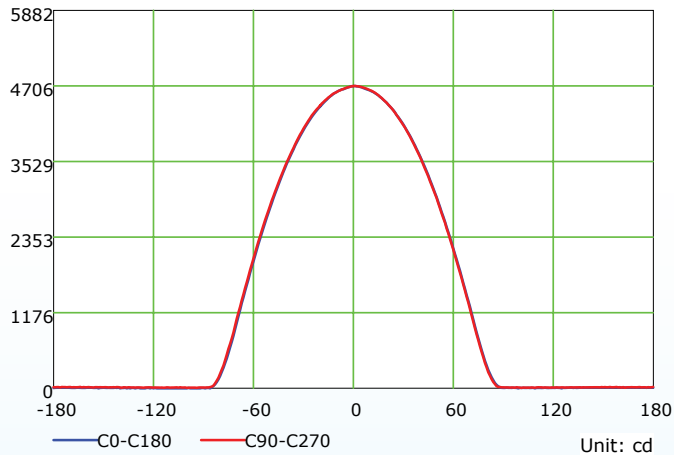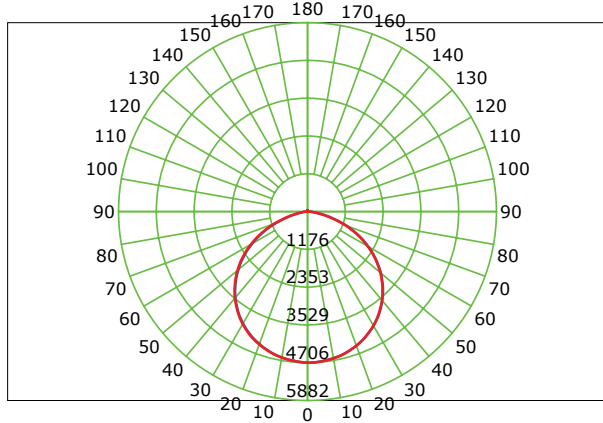

150W

Luminous Intensity Distribution Curve

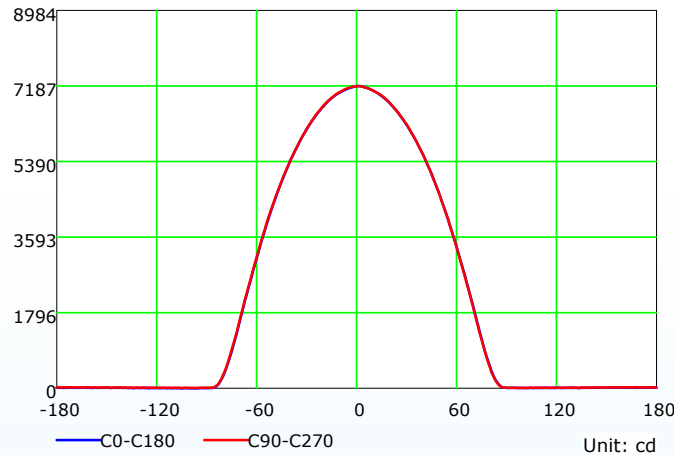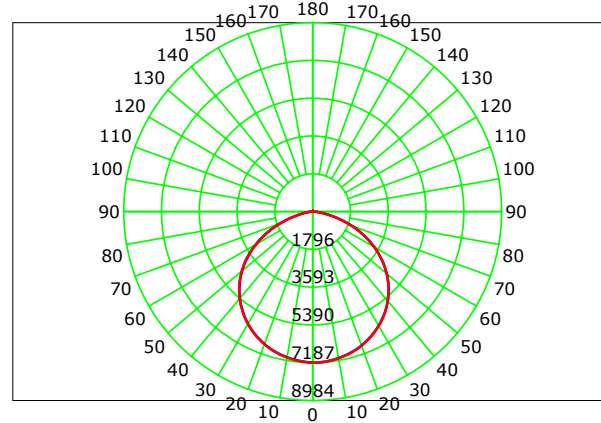

240W

Luminous Intensity Distribution Curve

