

Full-Cutoff Wall Pack: Flat-FC Line

3-CCT + 5-Power Selectable



Project: _____ Part #: _____
Type: _____

Wall Packs



Detail Specifications

- Finish: Bronze, Black, White, Custom finishes available
- IP Rating: Wet Location
- Impact Rating: IK08
- Beam Angle: Type IV S
- Chip: SMD 2835, R9 >50, CRI >80
- 3 Step MacAdam Ellipses
- BUG:
 - 3P60: B3-U3-G2
 - 3P120: B2-U2-G1
- Operating Temperature: -40° - 122° F
- Lens: Clear acrylic with optics
- Average life (L70) of 70,000 hours

Applications:

- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Full Cut-Off Dark Sky Compliant
- Photocell is included with an easy quick disconnect
- Instant-On to full brightness
- Select-n-Switch Technology: 3-CCT + 5-Power Selectable

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- HV: 277-480V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Five 1/2" knockouts: 1 one each side for convenient installation

Certifications:

- UL Listed for USA and CA
- DLC Premium Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

WATT	LUMENS	WATT	LUMENS
20	2,900	80	11,600
30	4,350	90	13,050
40	5,800	100	14,500
50	7,250	110	15,950
60	8,700	120	17,400

Series	Finish ¹	Photocell - PC -	Voltage	Sensor ²	Emergency	Surge Protector	Optional Accessories (Order Separately)
LED-WPFC-FL-5P60W-TRI 20/30/40/50/60W • 30/40/50K	BZ Bronze (Standard)	Photocell is included. Easy quick disconnect. (PC-3/4- 3PIN-LV)	(blank) 120-277V	(blank) No Sensor	(blank) No Emergency	(blank) 6KV Built in	Remote for Sensors S-LINE-R S-Line Remote
LED-WPFC-FL-5P120W-TRI 80/90/100/110/120W • 30/40/50K	BL Black		HV 277-480V	BMS Bi-Level Motion + Daylight Sensor (S-BMS- EXT-1)	EMB 90 Minute Emergency Backup 30-120F	20KV 20KV Surge Protector	
	WH White			BMSBT Bi-Level Motion + Daylight Sensor Bluetooth Control (S-BMS- EXT-1-BT)	CEMB 90 Minute Emergency Backup Cold Weather 4-120F		
	GRY ¹ Gray						
	CS ¹ Custom Color						
1. Standard quickship is bronze, black, & white. Other colors are custom finishes. 2. Sensors require remote for programming							

1. Standard quickship is bronze, black, & white. Other colors are custom finishes.


2. Sensors require remote for programming

Specs and model numbers are subject to change with or without notice.

FEATURES



DIMENSIONS

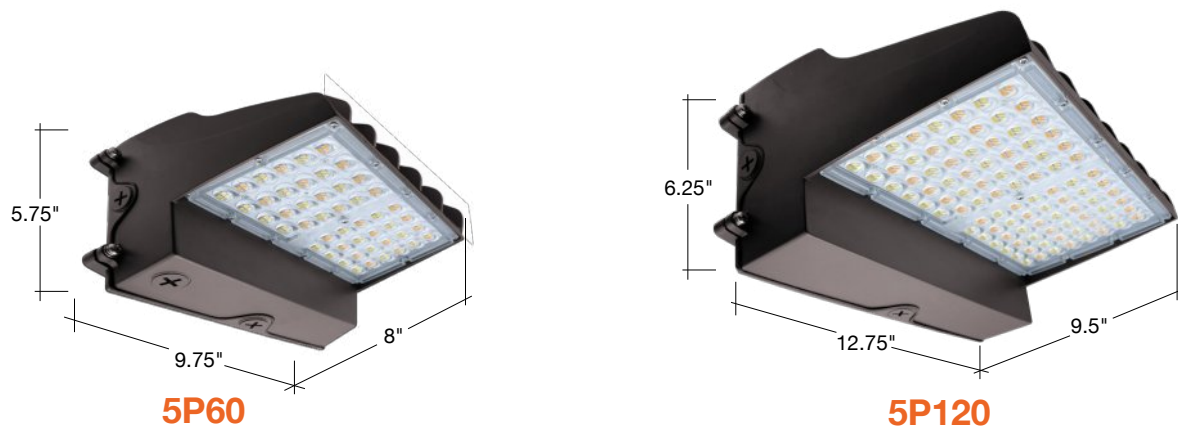

Full-Cutoff Wall Pack: Flat-FC Line

3-CCT + 5-Power Selectable

WALL PACK

Model	Voltage	Watts	Lumens	Color	CRI
LED-WPFC-FL-5P60W-TRI-BZ-PC	120-277V	20/30/40/50/60w	2900/4350/5800/7250/8700	30/40/50k	>80
LED-WPFC-FL-5P120W-TRI-BZ-PC	120-277V	80/90/100/110/120w	11600/13050/14500/15950/17400	30/40/50k	>80
LED-WPFC-FL-5P60W-TRI-BL-PC	120-277V	20/30/40/50/60w	2900/4350/5800/7250/8700	30/40/50k	>80
LED-WPFC-FL-5P120W-TRI-BL-PC	120-277V	80/90/100/110/120w	11600/13050/14500/15950/17400	30/40/50k	>80
LED-WPFC-FL-5P120W-TRI-WH-PC	120-277V	80/90/100/110/120w	11600/13050/14500/15950/17400	30/40/50k	>80
LED-WPFC-FL-5P120W-TRI-WH-PC	120-277V	80/90/100/110/120w	11600/13050/14500/15950/17400	30/40/50k	>80

REMOTE CONTROL

Accessory Model	Description
HB03R	Remote for HB-Line Series
S-LINE-R	Remote for S-LINE Series Sensors

PHOTOCELL

Accessory Model	Description
PC-BTN-UNV-1/2"	Button Photocell Universal for 1/2" Knockout

HB-LINE-SENSORS

Model	Item Description	Voltage	Watts
S-BMS-EXT-1	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting. Ideal for use with LED WALLPACKS. 12V Aux REQD. (Remote Required)	12V	<1w
S-BMS-EXT-1-BT	S-Line: Bi Level Motion Sensor w/ Daylight Harvesting. Ideal for use with Wallpacks. 12V Aux REQD. (Remote Required)	12V	<1w



HB03R



S-LINE-R



PC-BTN-UNV-1/2"



S-BMS-EXT-1
S-BMS-EXT-1-BT

Specs and model numbers are subject to change with or without notice.