

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

**PRODUCT DESCRIPTION**

This LED Housing series is designed for new construction installations and suitable for use in ceiling where the housing can be direct contact with insulation. For use in shallow ceiling which have tighter clearances.

**PRODUCT SPECIFICATIONS**

**Plaster Frame**

- Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box.

**Junction Box**

- Listed for through branch circuit wiring.
- Contains one 1-1/8", one 1/2", six 7/8" knockouts and four Romex pryouts with strain relief.

**Bar Hanger**

- Pre-installed Real nail easily installs in regular lumber, engineered lumber.
- Bar Hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame.


**Listings**

- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction

**CONNECT DIMMER SWITCH WIRING**


Model NO. LS-4-S-IC-AT

Standard version  
(120-277V, Triac Dimming at 120V)





**LS-4-S-IC-AT SHALLOW**

4" IC LED Dedicated Can Shallow  
New construction Housing )

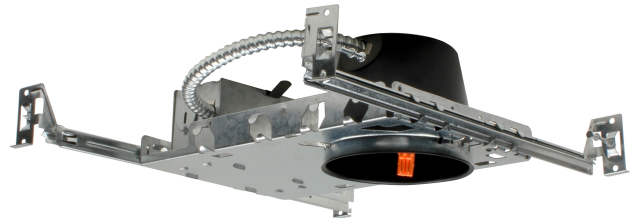

**DIMENSIONS**

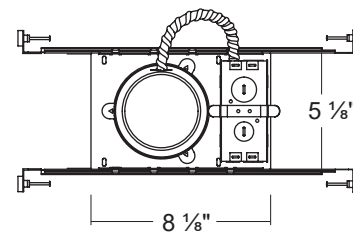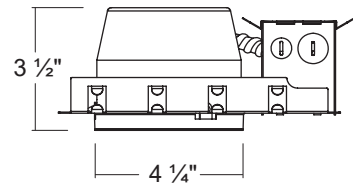

**ORDERING INFORMATION**

Catalog Number	Description
LS-4-S-IC-AT	4" IC Dedicated Can Shallow New construction Housing

**COMPATIBLE TRIMS**

Catalog Number	Description
LSL-403	4" LED Retrofit / Smooth
LSL-477	4" LED Retrofit / ADJUSTABLE SQ
LRKT411	4" LED Retrofit / Gimbal
LRKT488	4" LED Retrofit / 90DEGREE