



LS26-MEL MINI EMERGENCY LED LIGHT

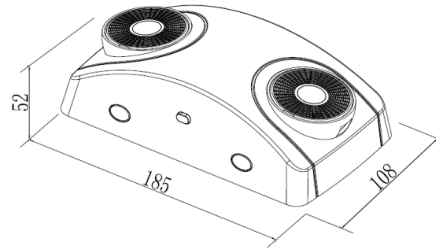

FEATURES

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-resistant
- Input Voltage: 120/277V
- Power consumption: 0.5W max.
- Output: 2W max.
- 3.6V Nickel Cadmium Battery
- Charging time: 24 hours
- Discharge time: 90 minutes
- Operating temperature: 0°C~40°C
- Dimension: 185*108*52mm

PHOTOMETRIC

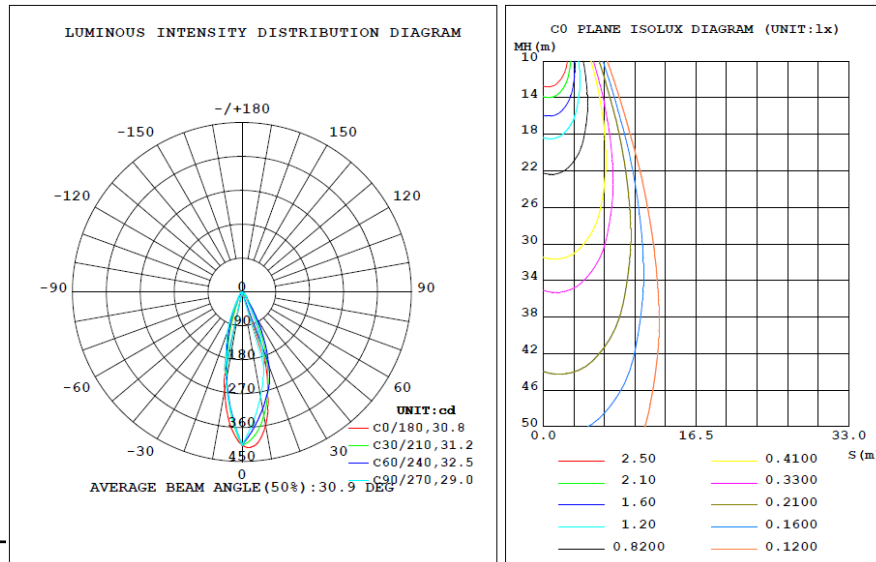

LS26-MEL	120/277V	90 minutes	UL, CUL
----------	----------	------------	---------