

Thermoplastic LED Emergency Light



LS26-MEL

FEATURES:

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact, thermoplastic housing
- High-performance chrome-plated metalized reflector and polycarbonate lens for optimal light distribution.
- Long lasting, efficient ultra-bright white LEDs.
- Adjustable LED lamp heads provides optimal center-to-center spacing.
- Test switch and charge rate indicator.
- Available in white or black housing.




MOUNTING:

- Surface mount, suitable for wall or ceiling mount. Conduit mount knockout on top of housing.
- Universal knockouts on back plate allow for wall mounting directly to standard J-Box. Canopy and mounting hardware provided.

ELECTRICAL:

- 120/277V dual voltage operation standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (Low Voltage Disconnection) prevents battery from deep discharge.

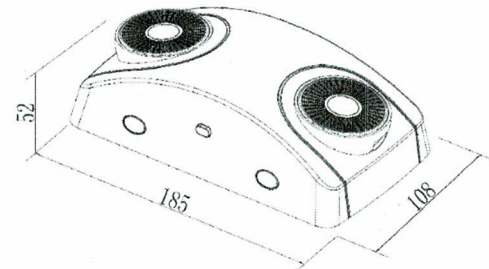

LAMPS:

- 2 x 1 Watts LED lamps are operating in Emergency (DC input) modes.
- Long lasting, efficient ultra-bright white LEDs.

BATTERY:

- 3.6V long-life maintenance-free and rechargeable Ni-Cad battery on emergency (EM) units.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Internal solid-state transfer switch automatically connects the internal battery to LEDs for minimum 90minute emergency illumination

LISTING:

- 5 years limited warranty on materials and all electronics. Battery is pro-rated for five years.
- LED lamps are 25 years limited warranty.
- UL listed for damp locations. (32°F ~ 104°F / 0°C ~ 40°C)
- Meets UL924, NFPA 70, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

ORDER INFORMATION

Model	Voltage	LED Lamp	Emergency Duration	Certificate
LS26-MEL	120/277V	2 x 1W	90 minutes	UL