

# 3CCT Turnable 2Inch 8W Deep Anti-Glare Downlight Specifications

## Description

Item No. : 3002- Wht/Wht-3CCT-120V-SQ

**2" LED anti-glare downlight** comes complete with an external driver in a junction box. Commercial grade quality with architectural design.

## Features and Benefits

- **Air Tight & Type IC Rated:** No housing Required.  
**Deep anti-glare design**, no harm to eyes .
- **Fast & Easy Installation:** Save labor cost.
- **Junction Box Included:** No additional hardware required.
- **CRI 90:** True color rendering .




## Specifications

Input Power	8W
Input Voltage:	100-130V AC, 50/60HZ
Lumen	450-500LM
Halogen Equivalent	60W
Efficiency	65LM/W
CRI	>90Ra
Power Factor	>0.9
LED Chip	COB
Beam Angle	36°
Color Temperature	30K/40K/50K
Dimension	Φ80*80*57mm
Cutout Size	Φ65mm
Dimming	Triac dimming 5-100%
Approved Locations	Insulated ceilings
Air Tight	Yes
Lamp Life	70% light output at 50000hrs
Certification	ETL , cETL,
Warranty	5 years
Qty/ Ctn	40pcs/ ctn
Ctn Size	58*34*37CM
Gross Weight	13KG

- **ETL-listed:** reliable quality and safe operation.
- Suitable for damp locations.
- **3CCT Turnable : 30K/40K/50K** Color option in one item

### Dimension Drawing

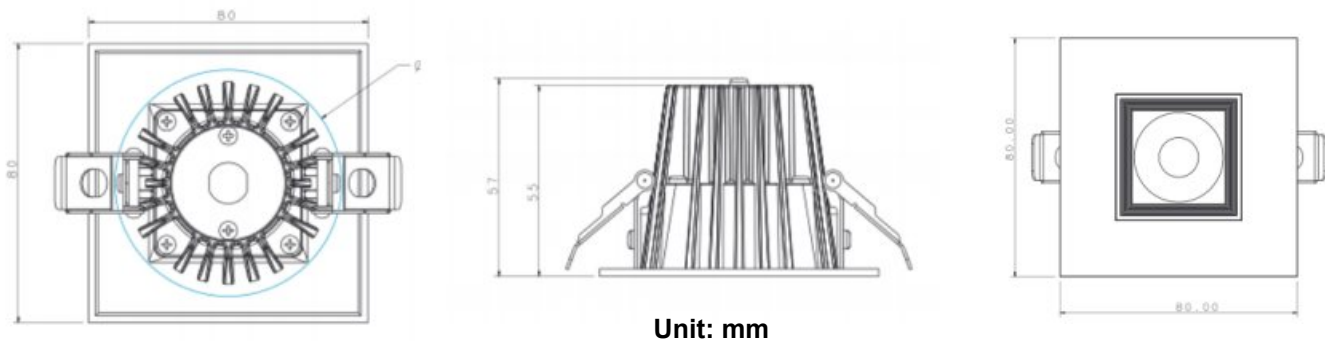

### Great Features and Benefits

- **Appearance:** Fashion & high quality design, with unique appearance, easier for marketing.
- **Body:** Durable, die cast aluminum alloy for optimal heat dissipation .
- **Paint:** The inner corn can be White and Black for choice
- **LEDs:** High brightness COB LED with CRI>90Ra, which guaranteed high lumen and high quality
- **Driver:** Isolated LED driver with 5 years warranty. 100-130V AC perfect Triac Dimming
- **Junction Box:** Included, install directly in Insulated Ceilings (IC) without any thermal housing.

### Compatible Dimmers

- **Lutron :** CTCL-153P / DVCL-153P / S-600P / SLV-600P / CN-600P
- **Levetion :** 6674 /6672

### Family Products



3002- Wht/Wht-3CCT-120V-SQ



3002- Wht/Blk-3CCT-120V-SQ