

BLAZE UFO HIGH BAY



Application: Warehouses, Distribution Centers, Retailers, Field Houses, Gymnasiums, Aisles, and more commercial and industrial applications.



Description

- Energy-efficient design delivers up to 140 LPW, with DLC Premium classification allowing participation in rebates.
- Includes a 6 FT power cord and a separate 3 FT dimming cord.
- Wattage and CCT are adjustable with 3,000K, 4,000K, or 5,000K color temperatures to suit different environmental needs.
- IP65 rated for wet locations.
- 5-year limited warranty.

Specification

Model		RY-UFO-240W-110-H-3W3CCT	
Power		150W/200W/240W	
Lumens		21000/28000/33600 lm	
Metal Halide Equal		400W-1000W	
DLC #		S-8R7D64	
Input Voltage	110-277 Vac		
Beam Angle	110°		
Housing	Die-cast Aluminum Housing		
Dimming	0-10V		
Protecting Rating	IP65		
Power Factor	0.9+		
CCT	3000K-4000K-5000K Selectable		
CRI	80+		
Working Life	Lumen Maintenance over 70% @50,000+ hours		
Oper. Temperature	-40° F to 113° F (-40° C to 45° C)		

Sensor Feature



OPTION

Reflector

Motion Sensor




BLAZE UFO HIGH BAY


Ordering Guide

Company Code	Product Series	Wattage	H	3W	3CCT	Option
HY	UFO: UFO4 Series	240W 150W/200W/240W Adjustable	H: 100-277V HV: 240-480V	3 Watt Adjustable	3000K-4000K-5000K Selectable	MS: Motion Sensor

Dimensions

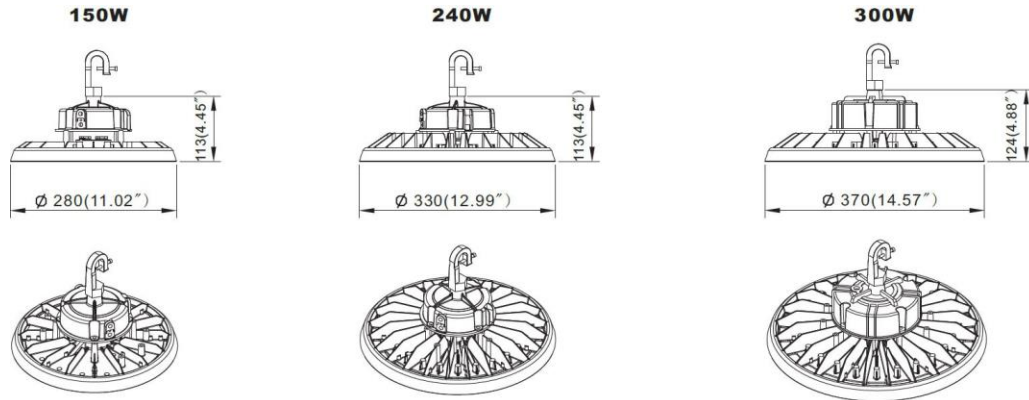

Watt and CCT Adjustable

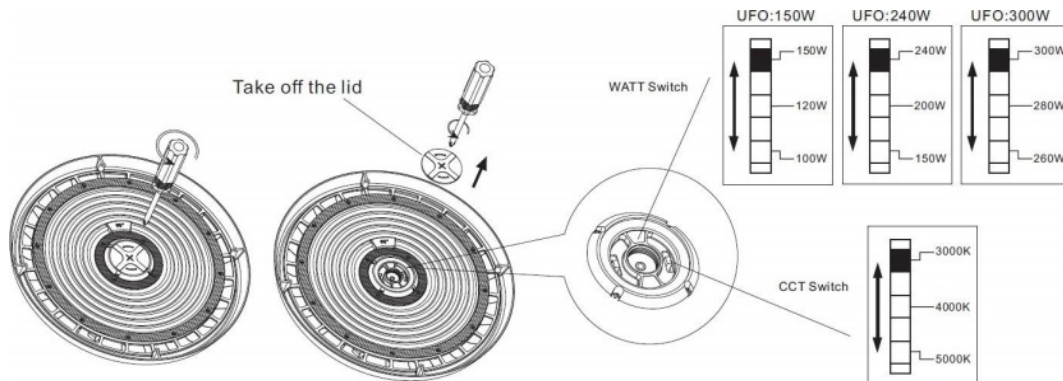

Mounting Guide

Model NO		RY-UFO-240W-110-H-3W3CCT	
Recommended Installation Height		15-26 FT	


BLAZE UFO HIGH BAY

Package Information

Model NO		RY-UFO-240W-110-H-3W3CCT	
Power		150W/200W/240W	
QTY/Pack		1 PC	
Package Size		350x340x135mm 13.77"x13.38"x5.31"	
Package Weight		3.6kg/ 7.9 lbs	
Package CBM		0.016065	

Photometric Report

HY-UFO-150W-110-H-3W3CCT
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

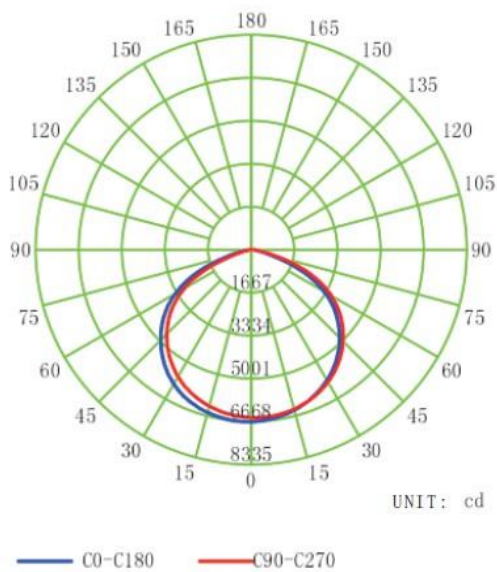

VERTICAL EQUILUMINOUS CURVE

