


T8 DUAL FIT

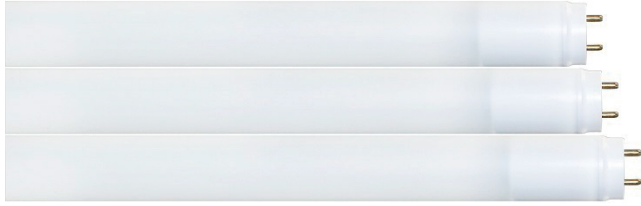


This 18W T8 is available in a 4 foot dual fit system. Choose to bypass the ballast and wire directly to line voltage either double or single sided or simply replace the T8 into the existing fixture with a ballast . We have added a safety feature by adding a protective film cover to shatterproof the new GEN2 Glass T8.

Applications:

- Warehouse Lighting
- Parking Lot Lighting
- Commercial Lighting

Product Information:

- Increase energy savings
- Standard size of 4 Foot Fluorescent
- Suitable for use in existing fixtures
- Use the existing ballast or rewire direct to AC power. Double Sided or single sided connection.
- Film protectant for extra shatter protection (Food Industry OK)
- Average life (L70) of 50,000 hours
- 5 Years Limited Warranty

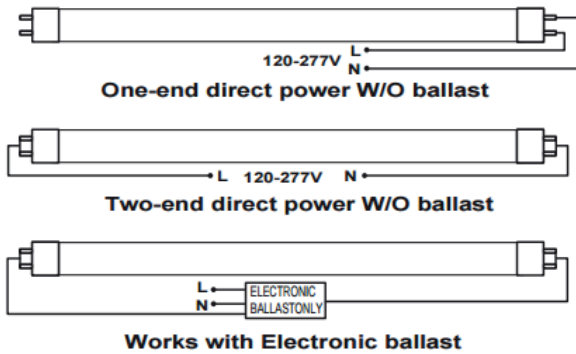

Type	Model	Volt	Watt	Lumen	Color	CRI	Beam Spread
T8	LED-T8DF-GLF2-18W-4FT-WW	120V-277V	18W	2100	3000K	>80	240°
T8	LED-T8DF-GLF2-18W-4FT-35	120V-277V	18W	2100	3500K	>80	240°
T8	LED-T8DF-GLF2-18W-4FT-CW	120V-277V	18W	2100	4000K	>80	240°
T8	LED-T8DF-GLF2-18W-4FT-DL	120V-277V	18W	2200	5000K	>80	240°



E477756