

# WAE




## TECHNICAL SPECIFICATIONS:

- :: Housing: Die-formed cold rolled steel with powder coated white
- :: Lens: Opal Polycarbonate
- :: Light Source: High-lumen LEDs
- :: Voltage: 100V-277V AC
- :: CRI: >82
- :: Power Factor: >0.95
- :: Installation: Ceiling-mounted
- :: Ambient Temperature: -22°F ~ +107°F
- :: Life Span: 50,000 hours, 5-year warranty



- OPTIONS**
- DAYLIGHT HARVESTING
  - MOTION SENSOR
  - BATTERY BACKUP

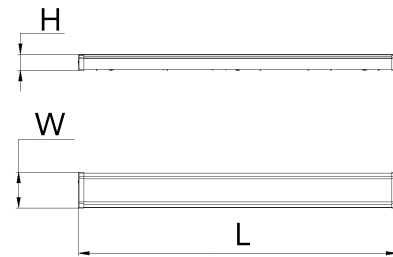

## LED ECONOMY WRAP-AROUND LIGHTS (0-10V DIMMING)

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	DIMENSIONS
WAE-4FT-30K-D	40W	3200LM	3000K	47.52"(L) x 5.35"(W) x 2.36"(H)
WAE-4FT-40K-D	40W	3200LM	4000K	
WAE-4FT-50K-D	40W	3200LM	5000K	
WAE-4FT-MCT-D	40W	3200LM	3000K/4000K/5000K	24.60"(L) x 5.35"(W) x 2.36"(H)
WAE-2FT-MCT-D	20W	1600LM	3000K/4000K/5000K	