


### DIMENSIONS:

14" x 14" x 4"

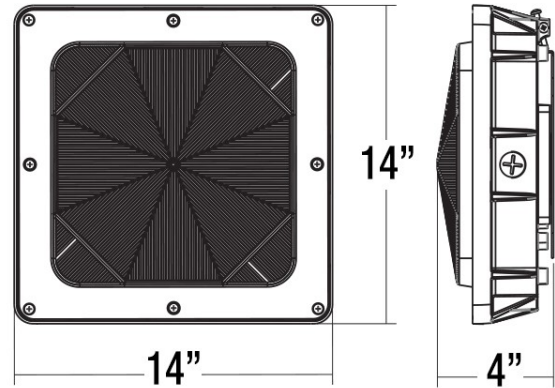

## CDL2-60CW CDL2-60NW CDL2-60WW

### LED LOW PROFILE CANOPY

Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting heights.

### ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 80W
- Other wattages: 45W, 80W
- Power factor: 90%
- Photoelectronic motion sensor compatible

### HOUSING SPECIFICATIONS:


- Die-cast aluminum with powder coat finish (Dark Bronze)
- Operating temperature: -40°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- High light transmittance, anti-UV and fire resistant PC lens

### CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
CDL2-60CW	60W	120~277V AC	7400 LM	5000K
CDL2-60NW	60W	120~277V AC	7100 LM	4000K
CDL2-60WW	60W	120~277V AC	7100 LM	3000K

### MOUNTING OPTIONS

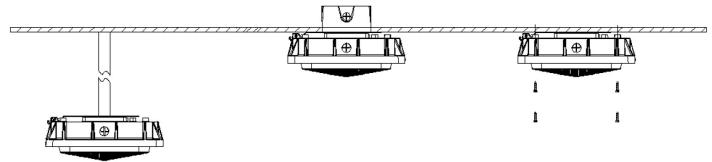

### LIGHTING SPECIFICATIONS:

- Dimmable: 0~10V dimmable
- LED type/brand: SMD 3030/ Philips Lumileds LEDs
- Total lumens: 7100lm and 7400lm
- Color temperature: 3000K / 4000K / 5000K
- Color rendering index: >80
- Beam angle: 120°

### SAFETY & EMC:

- 10KV surge protection

### WARRANTY: 5 years



JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

**CDL2-60CW**  
**CDL2-60NW**  
**CDL2-60WW**


MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
CDL2-60CW	60W	120~277V AC	7400 LM	5000K
CDL2-60NW	60W	120~277V AC	7100 LM	4000K
CDL2-60WW	60W	120~277V AC	7100 LM	3000K

**LED LOW PROFILE CANOPY**




**PHOTOMETRICS:**

PHOTOMETRIC DATA

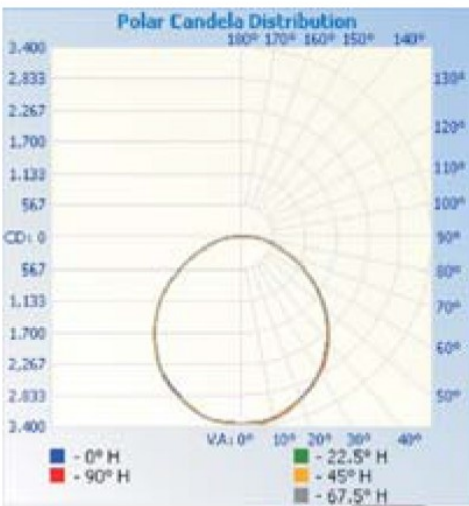

ISOCANDELA DIAGRAM

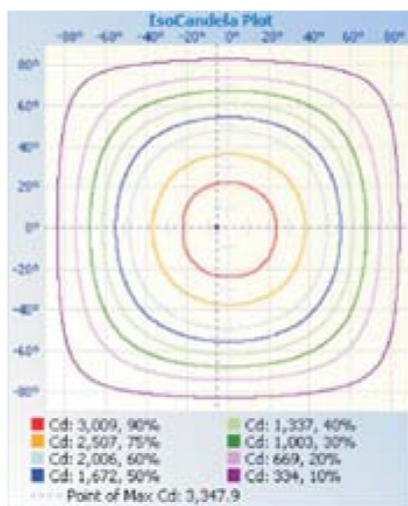

ILLUMINANCE PLOTS

	Center Beam f.c.	Beam Width	
17.0ft	11.55 f.c.	48.3 ft	49.0 ft
34.0ft	2.89 f.c.	96.6 ft	98.1 ft
51.0ft	1.28 f.c.	144.9 ft	147.1 ft
68.0ft	0.72 f.c.	193.2 ft	196.1 ft
85.0ft	0.46 f.c.	241.5 ft	245.2 ft
102.0ft	0.32 f.c.	289.8 ft	294.2 ft

Vert. Spread: 109.7°  
 Horiz. Spread: 110.5°

