

# SPOT-FREE COB LONG RUN STRIP

6474-XX-24V-COB-Long











5 year warranty

IP20




### Description

The 6474-COB-Long strips adopt a new generation of flipchip encapsulated technology, with high density 360 chips per meter for spot- free lighting. Constant current built-in IC design, enables a single-end feed of up to 50 feet without voltage drop!

#### **Dimensions**






## **Product Specification**

	Length	49.2ft / 98.4ft	Voltage(V)	24V DC
	ССТ	2700K/ 3000K/ 4000K/ 6000K	Power(W/ft)	2.9W
	Chips/m	360pcs	Width	10mm
	Max Run	49.2ft	Beam Angle	180°
	Cuttable Unit	2 in	Operation Temperature	-20°C~50°C
	Lumens/ft	2700K / 200Im/ft, 3000K / 217Im/ft, 4000K / 232Im/ft, 6000K / 261Im/ft		

# **Bining**

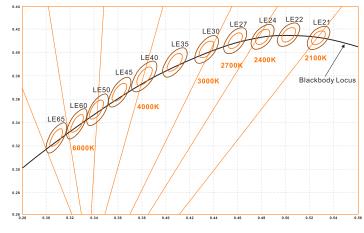

Ensure uniform color temperatures with our LED strip light's one-bin-only manufacturing process, guaranteeing consistency and reliability across all orders.





#### Precautions for use

- 1. To protect the LED light strip, do not hit the light-emitting area with hard things.
- 2. After unpacking, please use in 24H to avoid the oxidation effect of solder joints.
- 3. Avoid direct contact with high temperature objects in the light-emitting area of the lamp, and the instantaneous contact temperature of the surface of the light-emitting area should be less than 210 °C.
- 4. The soldering iron temperature should be less than 300° during soldering, and the soldering time of single solder should be controlled within 3s.
- 5. It is strictly forbidden to twist the lamp with short distance. The single lamp strip (0.5 m) has a maximum twist angle of 720°.
- 6. The bend diameter at any position needs to be greater than 1cm.